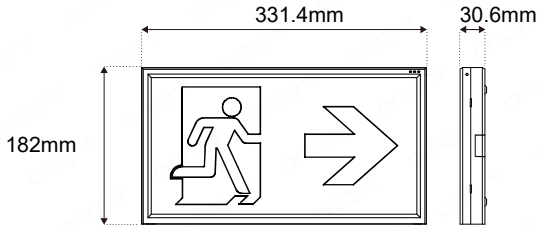


orlight®

FROM SOURCE TO SITE


INSTALLATION SHEET

EXIT-LUME-BOX(DALI)



LEGEND KIT

'LEFT'	- 1 OF
'RIGHT'	- 1 OF
'FORWARD'	- 2 OF
'BACK'	- 2 OF
'BLANK'	- 1 OF



**ALWAYS SWITCH
OFF THE MAINS
SUPPLY BEFORE
INSTALLATION
OR SERVING**

This product may contain substances that can be hazardous to the environment if not disposed of correctly. Electrical and electronic equipment should never be disposed of with general household waste but must be separated for its correct treatment and recovery. Where possible, recycle your packaging.

IMPORTANT INFORMATION

- It is recommended that the luminaires are installed and fitted by a qualified electrician, ensuring the installation complies to current IEE wiring regulations.
- These instructions should be read carefully and retained after installation for future reference and maintenance.
- Do not install this product on damp or newly plastered surfaces.
- The LEDs in this fitting are not replaceable.
- Ensure all electrical connections are secure and that there are no loose strands.
- This product is NOT dimmable.
- Do not connect battery supply until 220/240V A.C. supply is permanently fed and lamp fitted.
Allow 24 hours charge before running lamp in emergency mode.

APPROVALS AND CLASSIFICATIONS



IP20











0.3m

3W




www.orlight.com | 01923 851 890

INSTALLATION

- 1 
Isolate mains power
- 2 
Select appropriate legend
- 3 
Open the cover from the right and turn on the escape sign
- 4 
Lead the input line from any three holes indicated by the arrow to connect the PCB board
- 5 
a b c
- 6 
Terminate Emergency Sign into mains supply,
- 7 
Connect Battery
Do not connect battery supply until 220/240V A.C. supply is permanently fed and lamp fitted. Allow 24 hours charge before running lamp in emergency mode.
- 8 
Please select appropriate emergency legend to suit your exit requirements.
- 9 
Restore mains power

EMERGENCY TERMINATION MAINTAINED



Primary 240V 50Hz. Class II

Wire - Brown cable to connection marked "L"

Wire - Blue cable to connection marked "N"

DALI VERSION ONLY

	DALI (Red)
	DALI (Black)
	"L" Live (Brown)
	Earth (Green/Yellow)
	"N" Neutral (Blue)

THIS IS A CLASS I PRODUCT AND MUST BE EARTHED.

This product must be installed by a skilled or instructed person in accordance with the current edition of the IET Wiring Regulations BS 7671 "Requirements for Electrical Installations" and the Buildings Regulations, as may be applicable subject to the location and country of the installation.

Should this product be modified, misused or not installed as per the instructions given, the product warranty shall be rendered void.

All information contained within these installation instructions manual is provided in good faith. Orlight shall not be held responsible for any losses incurred as a result of the Customer's failure to follow the instructions manual thoroughly and in its entirety or failing to inspect the product for missing parts and/or any defects prior to installation.

For full Terms and Conditions, please visit our website at:
<https://www.orlight.com/en/terms-and-conditions.html>

SUGGESTED METHOD OF INSTALLATION

STEP 1: Isolate the mains supply before connecting. Unpack the luminaire and check that you have all the tools to install the luminaire safely and in compliance with current electrical standards. Ensure there are no obstructions.

STEP 2: Please select appropriate emergency legend to suit your exit requirements.

STEP 3: Open the cover from the right and turn on the escape sign

STEP 4: Feed the mains cable through the cable entry point in the body of the luminaire.

STEP 5: Position and fix the back cover to a suitable solid surface. (a) Drill holes (b) Fit Rawl Plugs (c) Fix into position. Do not install this fitting on newly plastered areas. Fix in 2 positions.

STEP 6: Terminate the mains cable into the terminal block mounted on the PCB ensuring that the correct polarity is observed.

STEP 7: Ensure the battery cells are connected.

Do not connect battery supply until 220/240V A.C. supply is permanently fed and lamp fitted. Allow 24 hours charge before running lamp in emergency mode.

STEP 8: Close the cover and put back the escape sign.

STEP 9: Turn on mains power supply and test luminaire for correct operation.

GUARANTEE

This product is guaranteed for a period of 2 years from the date of purchase. The guarantee is invalid in the case of improper use, improper installations or tampering. Should the product fail during the period it will be replaced free of charge, subject to correct installation and return of the faulty unit. The provider is not responsible for any costs associated with the replacement of this product.