

Ref:

ARCO-SQ-D-24W-2700K

Item No: ARCO SQUARE – 46949

orlight[®]
FROM SOURCE TO SITE


Arco Square is a compact IP65 exterior wall light with a crisp geometric form and a controlled 40 degree downward beam. Its aluminium body is paired with a remote driver for a clean architectural installation. Matt grey is the standard finish, with black, white and other RAL colours available on request.



NEW!

IP65

DIMENSIONS

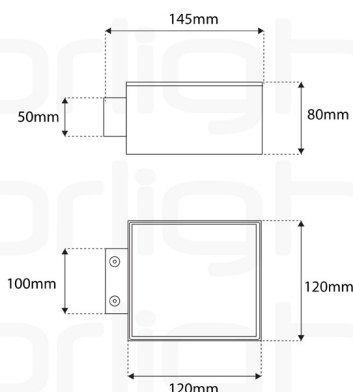

OPTICAL PERFORMANCE

Wattage	24W
Lumen Output	2208LM
Efficacy	92LM/W
CCT	2700K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	40°
Chipset	BRIDGELUX
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	600MA
Control	SWITCHED
Cable Length	1000 MM

CONSTRUCTION


Installation	SURFACE MOUNTED
Construction	ALUMINIUM
Length	145 MM
Width / Depth	120 MM
Height	80 MM
Tilt	FIXED
Finish	MATT GREY
IP Rating	IP65
Operating Ambient Temperature	-40°C - +50°C

ARCO-SQ-D-24W-2700K

Item No: ARCO SQUARE – 46949

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

