

DOMINO-140MA-DR-DIM


ITEM NO. DRIVER - 21971

DOMINO-140MA-DR-DIM is a constant current LED driver dimmable via leading edge and trailing edge phase dimmers with short-circuit protection and self-recovery function.

Input: 220-240VAC ~ 47-63Hz
Output: 140mA



Dimension

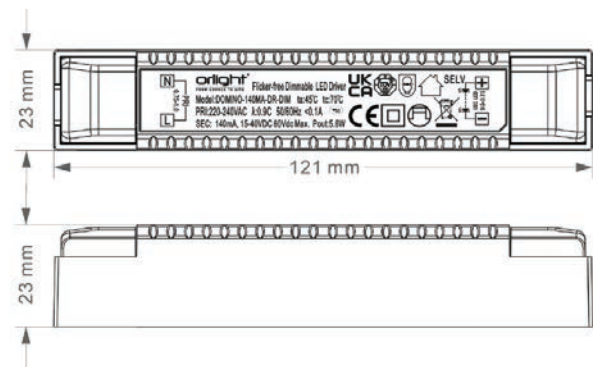

Technical Specification

Mains dimming	Leading & Trailing edge phase dimmers
Rated Supply Voltage	220 - 240V
Input Voltage AC	185 - 264V
Mains Frequency	47 - 63Hz
Max. Power	5.6W
Power Factor [@230V, 50Hz full load]	0.9
Typ. Efficiency [@230V, 50Hz full load]	74%
THD [@230V, 50Hz full load]	<15%
Starting time	<0.55s @ 230V
Leakage current	<2mA
Output current [fixed]	140mA
Min / Max forward voltage, DC	15 - 40V
Type of protection	IP20
Operating temperature	-25 °C to +45 °C
Storage temperature & humidity	-40 °C to +80 °C 10% RH no condensation
Lifetime	>50,000 hrs
Guarantee	2 years
Dimensions L x W x H	121mm x 23mm x 23mm
Net weight	40g
Test Procedure	TUV mark, E-LVD & UKCA

Standards

IEC 61347-2-13:2014, AMD1:2016 used in conjunction with IEC 61347-1:2015, AMD1:2017.
IEC 60598-2-1:2020 used in conjunction with IEC 60598-1:2020.
IEC 62493 [ED2]
EN61000-4-2,3,4,5,6,8,11; EN61547