


Instructions

Please ensure the power supply is fully switched off before carrying out any installation work.


Step 1 – Prepare the Ceiling

Prepare the ceiling cut-out to the required diameter and confirm the ceiling thickness is within the specified range.

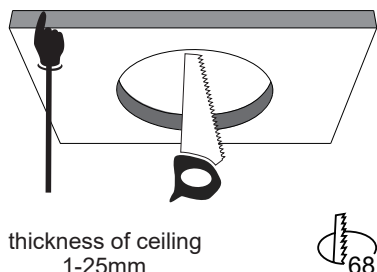


Step 2 – Connect the Mains Supply

Pass the mains cable through the luminaire opening and connect the driver wiring to the mains supply in accordance with all relevant wiring regulations.

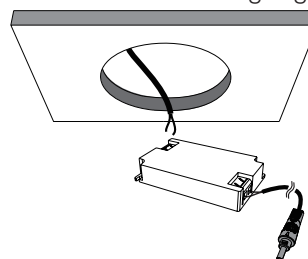


Step 3 – Remove the Front Bezel

Twist and pull the front bezel away from the luminaire housing to remove it.

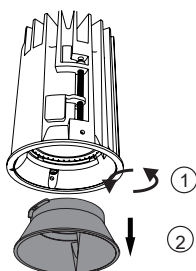


Step 4 – Connect the Driver to the Luminaire

Attach the luminaire connector to the LED driver, ensuring the connection is firm and fully secured.

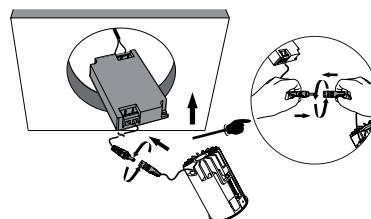


Step 5 – Position the Driver and Insert the Luminaire

Feed the LED driver through the ceiling cut-out and position it safely within the ceiling void, ensuring no cables are pinched or overstretched. Insert the luminaire into the ceiling cut-out.

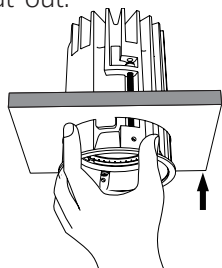


Step 6 – Secure the Luminaire

Push the unit into the ceiling. Ensure the wall-marking indicator faces toward the wall. The fixture should engage with a clear click when correctly secured.

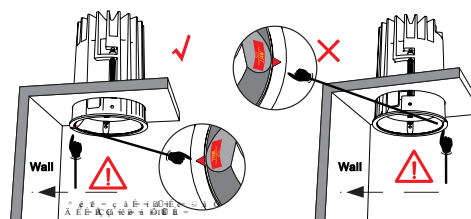


Step 7 – Fix the Unit in Place

Screw the product in position to ensure it is firmly mounted.

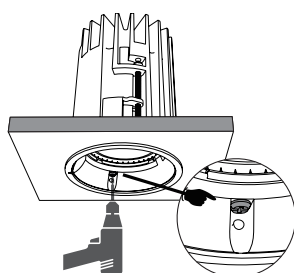

Step 8 – Refit the Wall Wash Bezel


Align the bezel with the front of the fixture, then push and twist it back into place. Ensure it locks securely and sits flush with the ceiling.

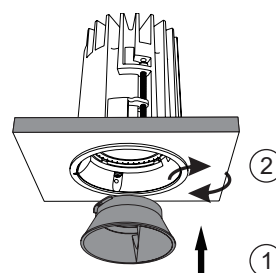

Instructions Continued

Step 9 – Ensure Correct Orientation

Position the luminaire so the wall-wash section faces directly towards the wall. Do not install the bezel at an angle or facing away from the wall, as this will affect the lighting performance. Ensure the fixture sits level and correctly aligned before final adjustment.

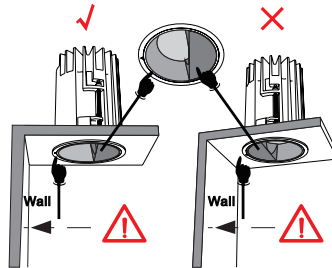

Disclaimer

This product must be installed by a skilled or instructed person in accordance with the current edition of the IET Wiring Regulations BS 7671 "Requirements for Electrical Installations" and the Buildings Regulations, as may be applicable subject to the location and country of the installation.

Should this product be modified, misused or not installed as per the instructions given, the product warranty shall be rendered void.

All information contained within these installation instructions manual is provided in good faith. Orlight shall not be held responsible for any losses incurred as a result of the Customer's failure to follow the instructions manual thoroughly and in its entirety or failing to inspect the product for missing parts and/or any defects prior to installation.

For full Terms and Conditions, please visit our website at: <https://www.orlight.com/en/terms-and-conditions.html>

Hole Cut Out:

Orlight does not recommend cutting of holes prior to receipt of product in hand. Please refer to reverse or Orlight's technical support/website for recommended hole cut out.

Wiring:

Disconnect the mains supply before installation. Ensure that the unit is installed and maintained by a certified professional and that installation conforms to any local building control standard applicable.

Accessories:

Please ensure that any accessory used in conjunction with these products is approved by Orlight. Failure to do so will void any product guarantee. Orlight will not be held responsible for any loss incurred be it direct or consequential.

NOTE – Light fittings in general can become hot whilst in operation. It is advisable that they do not come into contact with any flammable materials such as fabrics, furniture, soft furnishings or touched during/after operation.