

Ref:

LUNEX-1500-48W-3K-DALI-B-EM

Item No: LUNEX – 41684

orlight[®]
FROM SOURCE TO SITE

The LUNEX-1500 is a premium 48W DALI-B-EM 3K linear LED tubular light designed for commercial interiors and architectural lighting schemes. This model is supplied as a non-linkable fixture. Its sleek form and high-efficiency output deliver wide 120° illumination with excellent visual comfort. A PMMA diffuser and 316L stainless steel end caps offer a refined, modern aesthetic. Ideal for offices, clean zones, and exposed ceilings in contemporary environments. Supplied with a Quick-Fit surface bracket; suspension kit available separately. Featuring integral emergency.



DIMENSIONS



OPTICAL PERFORMANCE

Wattage	48W
Lumen Output	7920LM
Efficacy	165LM/W
CCT	3000K
CRI	CRI > 80
Beam Angle	120°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 100,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	240V
Milliamp / Current	315MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE / SUSPENDED
Construction	PMMA
Diameter	72MM
Length	1500 MM
Finish	STAINLESS STEEL
IP Rating	IP66
IK Rating	IK06
Operating Ambient Temperature	-20°C - +40°C

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	475LM

LUNEX-1500-48W-3K-DALI-B-EM


Item No: LUNEX – 41684

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES

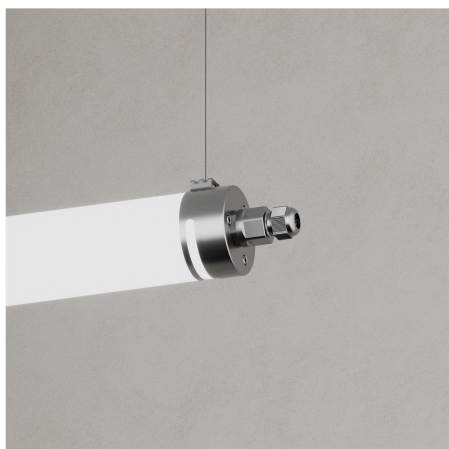

FIXING DETAILS



SUSPENSION KIT



999-ORLALP018-R-SW

13781

Suspension Kit