

Ref:

ORL1009-F-HS-AW-9016-240V

Item No: ORL1009 – 12871



Fixed architectural fire rated downlight featuring a magnetic lamp change mechanism. For further details on the fire rating, please get in touch with our team by emailing technicalsupport@orlight.com Orlight does not recommend cutting of holes prior to receipt of product in hand.




OPTICAL PERFORMANCE	
LOR	80

CONSTRUCTION	
Installation	RECESSED
Construction	ALUMINIUM
Diameter	88 MM
Height	108 MM
Cutout	82 MM
Tilt	FIXED
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP20
Fire Rated	YES
Fire Rating	90 MINS
Compatible Light Source	GU10
Lamp Change	MAGNETIC MECHANISM



DIMENSIONS

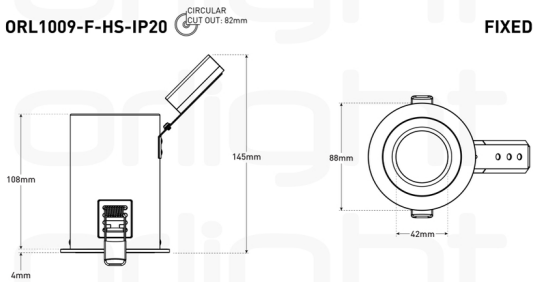

ORL1009-F-HS-AW-9016-240V

Item No: ORL1009 – 12871

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE