

Ref:

ORL1018-1-IP44-AW-9016

Item No: ORL1018 – 13007


orlight
FROM SOURCE TO SITE

Trimless magnetic fixture featuring construction rated to IP44 and design to appear invisible in-situ. The fixture incorporates an Anti-Glare baffle with magnetic lamp change mechanism ensuring maintenance functionality without damage to ceilings. Please note this product is not suitable for use with conical fire hoods. Please contact the sales office for fire hood specification. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

ORL1018-1-IP44

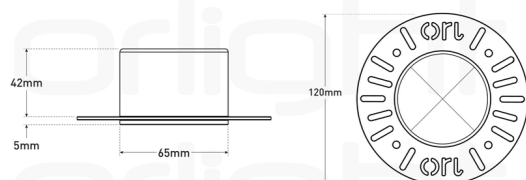

FIXED

OPTICAL PERFORMANCE

LOR	82
-----	----

CONSTRUCTION

Installation	RECESSED TRIMLESS
Construction	ALUMINIUM
Diameter	65 MM
Height	47 MM
Cutout	70 MM
Weight	0.245KG
Tilt	FIXED
Rotation	FIXED
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP44
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM


ADDITIONAL DIMENSIONS

ORL1018-1-IP44 with
LED ENGINES



FIXED

Allow +5mm for Cable Clearance

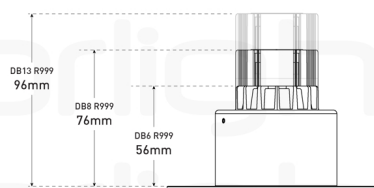


ORL1018-1-IP44 with
GU10 LAMPS



FIXED

Allow +20mm for Cable Clearance



ORL1018-1-IP44-AW-9016

Item No: ORL1018 – 13007

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999

ACCESSORIES



MC2-TR

11915

Long Spring Mains Converter for Orlight Trimless series



MC2-TR-WL

11918

Long Spring Mains Converter for Orlight Trimless series with flex