

Ref:

ORLTL-TRACK-WH-1M

Item No: ORLTL-TRACK – 15588

orlight[®]
FROM SOURCE TO SITE

Standard track for Orlight's ORLTL range. This track features Aluminium construction and is finished in Black RAL9011 or White RAL9010. This track can be surface mounted or can be suspended with the use of Orlight's surface mounting kit. Configure and complete your ORLTL track with a selection of accessories below



CONSTRUCTION

Installation	SURFACE/SUSPENDED
Construction	ALUMINIUM
Length	1000MM
Width / Depth	35.2 MM
Height	35.2 MM
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20

DIMENSIONS



ORLTL-TRACK-WH-1M


Item No: ORLTL-TRACK – 15588

orlight®
FROM SOURCE TO SITE

FIXING DETAILS


Fixing Holes

L (mm)	A (mm)	B (mm)	C (mm)	D (mm)
1000mm	125			
2000mm	125	998		
3000mm	125		914	1167

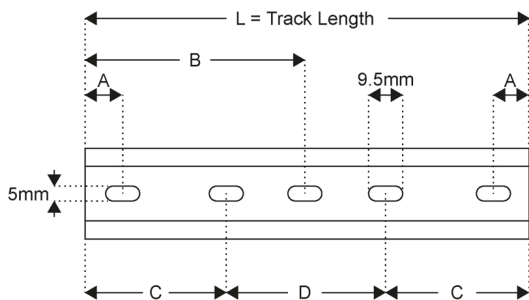


WIRING DIAGRAM

Electrical Connections

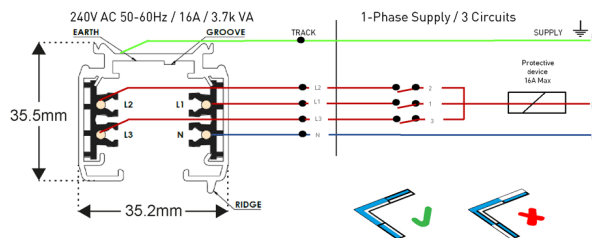

Continuity of the neutral marked in blue.

The track can be Cut to length by the installer if required.



POWER ENTRY

ORLTL-ACC-ERPE-WH
15532
End Right Power Entry

ORLTL-ACC-ELPE-WH
15528
End Left Power Entry



ORLTL-ACC-CPE-WH
15522
Central Power Entry

CONNECTOR



ORLTL-ACC-TRE1-WH
15561
'T' Shaped Right Entry Connector



ORLTL-ACC-TRE2-WH
15565
'T' Shaped Right Entry Connector



ORLTL-ACC-TLE1-WH
15553
'T' Shaped Left Entry Connector



ORLTL-ACC-TLE2-WH
15557
'T' Shaped Left Entry Connector

ORLTL-TRACK-WH-1M

Item No: ORLTL-TRACK – 15588

orlight[®]
FROM SOURCE TO SITE



ORLTL-ACC-QC-WH
15549
Quad Connector



ORLTL-ACC-L90RE-WH
15544
'L' Shaped Right Entry Connector



ORLTL-ACC-L90LE-WH
15540
'L' Shaped Left Entry Connector



ORLTL-ACC-FCPE-WH
15536
Flexible Central Power Entry

PENDANT ADAPTER



ORLTL-ACC-3P-ADAPTER-WH
15516
Track Pendant Adapter

COUPLER



ORLTL-ACC-COUPLER-WH
15519
Coupler

END CAP



ORLTL-ACC-EC-WH
15525
End Cap

ORLTL-TRACK-WH-1M

Item No: ORLTL-TRACK – 15588

SUSPENSION KIT



ORLTL-SUSKIT-1.5M
15580
1.5M Suspension kit for ORLTL Track



ORLTL-SUSKIT-3M
15581
3M Suspension kit for ORLTL Track