

Ref:

ORION-TR-13W-AW-IP54-FG-3000K


Item No: ORION – 22415

orlight[®]
FROM SOURCE TO SITE

Orion Trimless fixture combines thermal management with a LED chipset to enable superior performance with a passive cooling system. Aluminium construction. CRI>90 for light quality assurance, consistency is adhered to with a 2-Step MacAdams Ellipse binning strategy. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

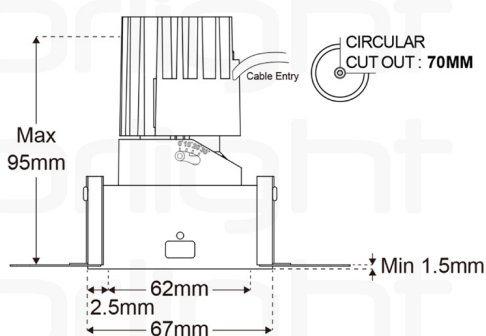

OPTICAL PERFORMANCE

Wattage	13W
Lumen Output	1469LM
Efficacy	113LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	24° / 40° / 55°
UGR	UGR < 19
Chipset	BRIDGELUX
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	300MA
Driver Configuration	REMOTE
Control	SWITCHED

CONSTRUCTION

Installation	RECESSED TRIMLESS
Construction	ALUMINIUM
Diameter	67 MM
Height	95 MM
Cutout	70 MM
Tilt	30°
Rotation	355°
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP54

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORION-TR-13W-AW-IP54-FG-3000K

Item No: ORION – 22415

LIGHT DISTRIBUTION

