

Ref:

ORION-TR-13W-BL-3000K


Item No: ORION – 12691

orlight[®]
FROM SOURCE TO SITE

Orion Trimless fixture combines thermal management with a LED chipset to enable superior performance with a passive cooling system. Aluminium construction. CRI>90 for light quality assurance, consistency is adhered to with a 2-Step MacAdams Ellipse binning strategy. IP54 option available. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

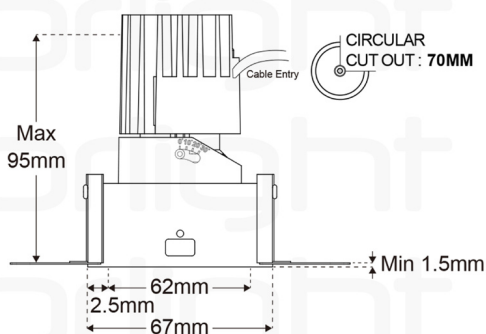

OPTICAL PERFORMANCE

Wattage	13W
Lumen Output	1322LM
Efficacy	113LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	24° / 40° / 55°
UGR	UGR < 19
Chipset	BRIDGELUX
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	300MA
Driver Configuration	REMOTE
Control	SWITCHED

CONSTRUCTION

Installation	RECESSED TRIMLESS
Construction	ALUMINIUM
Diameter	67 MM
Height	95 MM
Cutout	70 MM
Tilt	30°
Rotation	355°
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORION-TR-13W-BL-3000K

Item No: ORION – 12691

LIGHT DISTRIBUTION

