

Ref:

ORLTL-R-BL-35W-4000K


Item No: ORLTL – 15572

orlight[®]
FROM SOURCE TO SITE

Track lighting system combining advanced thermal management with a CREE CXA1512 LED chipset for enhanced performance. Versatile range of motion — 60° on the vertical axis and 360° rotation — for direction of light to application. Single chipset for beam uniformity, with interchangeable optics (24°, 38° and 60°). CRI >90, 2-Step MacAdams Ellipse binning for colour consistency. Up to 3519 Lumen output and integrated mains dimmable option.



DIMENSIONS

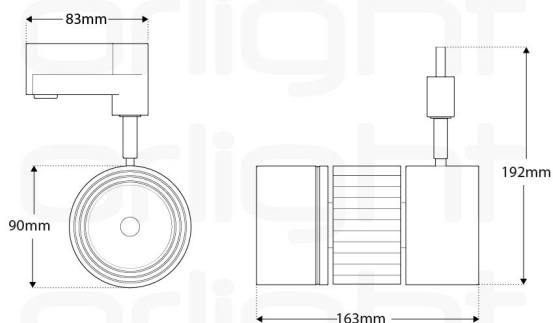

OPTICAL PERFORMANCE

Wattage	35W
Lumen Output	3761LM
Efficacy	107LM/W
CCT	4000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	24° / 38° / 60°
Chipset	CREE CXA1512
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-250V
Milliamp / Current	16AmA
Driver Configuration	INTEGRAL
Control	MAINS DIMMABLE


CONSTRUCTION

Installation	TRACK
Construction	ALUMINIUM
Diameter	90 MM
Length	163 MM
Width / Depth	83 MM
Height	192 MM
Weight	1.613KG
Tilt	60°
Rotation	360°
Finish	BLACK
RAL	RAL 9011
IP Rating	IP20

ORLTL-R-BL-35W-4000K

Item No: ORLTL – 15572

LIGHT DISTRIBUTION

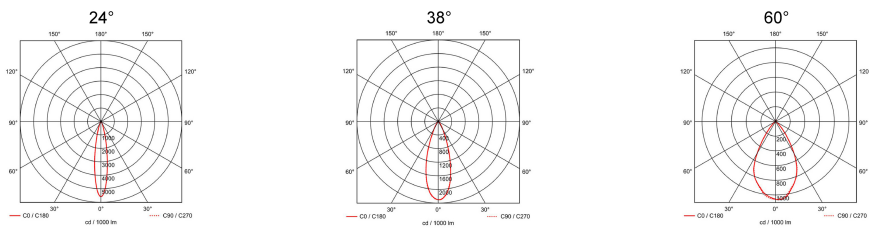

COMPATIBLE TRACKS



ORLTL-TRACK-BL-1M
15582
ORLTL Standard Track



ORLTL-TRACK-BL-2M
15584
ORLTL Standard Track



ORLTL-TRACK-BL-3M
15586
ORLTL Standard Track