

Ref:

ORL1009-HS-IP44-AW-9016-NL

Item No: ORL1009 – 12884

orlight[®]
FROM SOURCE TO SITE

Architectural downlight with anti-glare baffle and magnetic lamp change mechanism; the recessed light source minimises glare. High specification, with a spring ceiling retention mechanism (rather than blades). Not suitable for use with conical fire hoods — contact the sales office for fire hood specification. Independently tested and certified for 90-minute fire resistance in solid joist constructions when used with Diablo LED engines. Orlight does not recommend cutting holes before product is received.




DIMENSIONS

ORL1009-HS-IP44

CIRCULAR
CUT OUT: 78mm

FIXED

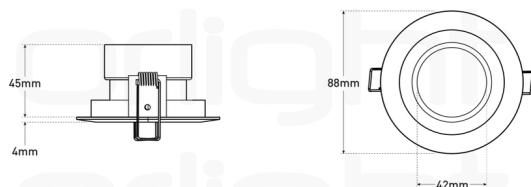

OPTICAL PERFORMANCE

LOR	68
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	88 MM
Height	49 MM
Cutout	78 MM
Weight	0.127KG
Tilt	FIXED
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP44
Fire Rated	YES
Fire Rating	90 MINS - SOLID JOIST
Fire Rated With	DIABLO RETROFIT ENGINE
Fire Test Report	424737
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE


ORL1009-HS-IP44-AW-9016-NL

Item No: ORL1009 – 12884


orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

ORL1009-HS-IP44 with **LED ENGINES**  **CIRCULAR CUT OUT: 78mm** **FIXED**
Allow +5mm for Cable Clearance



ORL1009-HS-IP44 with **GU10 LAMPS**  **CIRCULAR CUT OUT: 78mm** **FIXED**
Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

ORL1009-HS-IP44-AW-9016-NL

Item No: ORL1009 – 12884

orlight[®]
FROM SOURCE TO SITE




DB13-R999


ACCESSORIES



MC2-SL-WL
11912
Slim Spring Mains Converter for Orlight
Magnetic series with flex



LOUVRE-HC
11753
Honeycomb Louvre

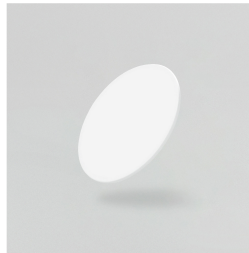

ORL1009-1019-SCOVER
12856
Silicone Cover for ORL1009 & ORL1019