

Ref:

ORL1019-F-HS-S-IP54-AW-240V

Item No: ORL1019 – 13050

orlight[®]
FROM SOURCE TO SITE

Adjustable high specification architectural downlight, featuring a magnetic lamp change mechanism with spring ceiling retention mechanism, as opposed the blades. For further details on the fire rating, please get in touch with our team by emailing technicalsupport@orlight.com Orlight does not recommend cutting of holes prior to receipt of product in hand.




DIMENSIONS

OPTICAL PERFORMANCE

LOR	70
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	89 MM
Height	112 MM
Cutout	82 MM
Weight	0.368KG
Tilt	10°
Rotation	360°
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP54
Fire Rated	YES
Fire Rating	90 MINS
Compatible Light Source	GU10
Lamp Change	MAGNETIC MECHANISM

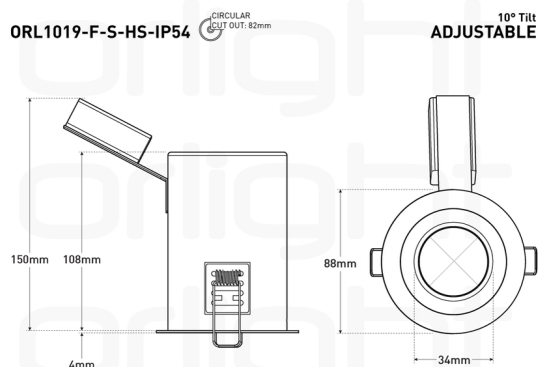

ORL1019-F-HS-S-IP54-AW-240V

Item No: ORL1019 – 13050

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE