

Ref:

ORL1009-S-HS-IP44-AW-9016-NL

Item No: ORL1009 – 12936

orlight[®]
FROM SOURCE TO SITE

Architectural downlight featuring an anti-glare baffle and magnetic lamp change mechanism. The recessed light source serves to minimise glare whilst slim line construction allows for applications with restricted recess depth. High specification features a spring ceiling retention mechanism as opposed to retention blades. Please note this product is not suitable for use with conical fire hoods. Please contact the sales office for fire hood specification. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	72
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	88 MM
Height	39 MM
Cutout	75 MM
Tilt	FIXED
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP44
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL1009-S-HS-IP44



FIXED

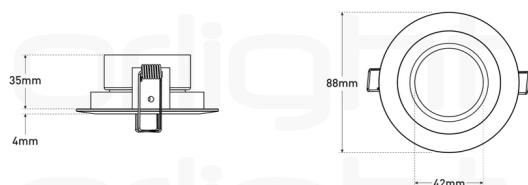


ORL1009-S-HS-IP44-AW-9016-NL

Item No: ORL1009 – 12936


orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

ORL1009-S-HS-IP44 with **LED ENGINES**  **FIXED**
CIRCULAR CUT OUT: 75mm Allow +5mm for Cable Clearance

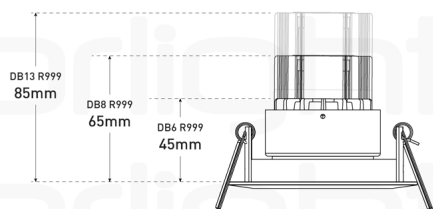

ORL1009-S-HS-IP44 with **GU10 LAMPS**  **FIXED**
CIRCULAR CUT OUT: 75mm Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

ORL1009-S-HS-IP44-AW-9016-NL

Item No: ORL1009 – 12936

orlight[®]
FROM SOURCE TO SITE




DB13-R999

ACCESSORIES




MC2-SL-WL

11912
Slim Spring Mains Converter for Orlight
Magnetic series with flex



LOUVRE-HC

11753
Honeycomb Louvre



ORL1009-1019-SCOVER

12856
Silicone Cover for ORL1009 & ORL1019