

Ref:

AQUASPOT-WW-FG-WH-NL

Item No: AQUA – 10366

orlight[®]
FROM SOURCE TO SITE

Architectural downlight featuring a fixed 30° tilt and recessed light source to minimise glare. Discreet application with reduced trim bezel. Construction rated to IP65 incorporating a frosted internal diffuser. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	72
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	80 MM
Height	48 MM
Cutout	73 MM
Weight	0.09KG
Tilt	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP65
Compatible Light Source	GU10 / ENGINE
Lamp Change	REMOVAL OF FIXTURE


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

AQUASPOT-WW



FIXED

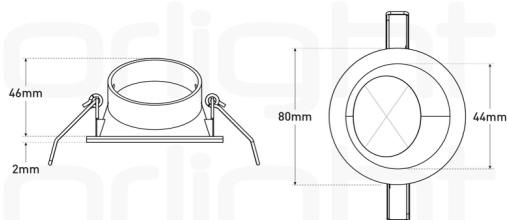


AQUASPOT-WW-FG-WH-NL

Item No: AQUA – 10366


orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

AQUASPOT-WW with **LED ENGINES**  CIRCULAR
OUT: 73mm **FIXED**
Allow +5mm for Cable Clearance

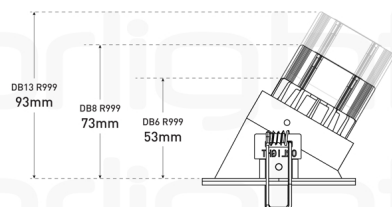

AQUASPOT-WW with **GU10 LAMPS**  CIRCULAR
OUT: 73mm **FIXED**
Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

AQUASPOT-WW-FG-WH-NL

Item No: AQUA – 10366

orlight[®]
FROM SOURCE TO SITE



DB13-R999

ACCESSORIES



MC2-SL-WL

11912
Slim Spring Mains Converter for Orlight
Magnetic series with flex



MC2-SL

11911
Slim Spring Mains Converter for Orlight
Magnetic series