

Ref:

# CL-P55-BL-3K-DALI


Item No: CROSSLINE – 10525

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

LED track mounted pendant constructed from Aluminium and finished in Black RAL9005. Available in 3000K and 4000K colour temperature. CRI >90 for light quality assurance.



## DIMENSIONS

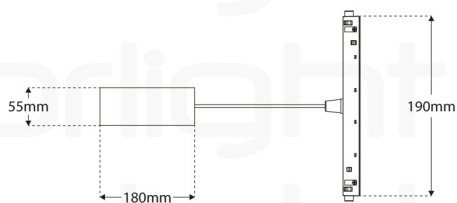

## OPTICAL PERFORMANCE

|              |                     |
|--------------|---------------------|
| Wattage      | 14W                 |
| Lumen Output | 840LM               |
| Efficacy     | 60LM/W              |
| CCT          | 3000K               |
| CRI          | CRI > 90            |
| Binning      | 2 STEP MACADAMS     |
| Beam Angle   | 18°                 |
| Chipset      | CITIZEN LED CHIPSET |
| Chip Life    | L70 > 50,000HRS     |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT VOLTAGE |
| Voltage                     | 48V              |
| Control                     | DALI DIMMABLE    |

## CONSTRUCTION


|               |           |
|---------------|-----------|
| Installation  | TRACK     |
| Construction  | ALUMINIUM |
| Diameter      | 55 MM     |
| Length        | 180 MM    |
| Width / Depth | 190 MM    |
| Tilt          | FIXED     |
| Rotation      | FIXED     |
| Finish        | BLACK     |
| RAL           | RAL 9005  |
| IP Rating     | IP20      |

# CL-P55-BL-3K-DALI


Item No: CROSSLINE – 10525

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION



## STANDARD DALI TRACK



**CL-ST-BL-2M-DALI**  
10556  
Standard DALI Track

## SLIM DALI TRACK




**CL-SLT-BL-2M-DALI**  
10552  
Slim DALI Track

## RECESSED/TRIMLESS DALI TRACK



**CL-RCT-BL-2M-DALI**  
10527  
Recessed/Trimless DALI Track

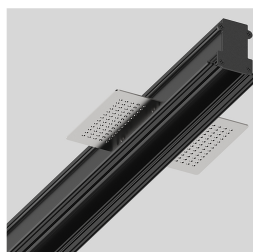

**CL-RCT-BL-3M-DALI**  
10528  
Recessed/Trimless DALI Track