


Ref:

GRAFIK10-WH-3000K-DALI-B-EM


Item No: GRAFIK – 11236

orlight[®]
FROM SOURCE TO SITE

Orlight's Grafik range is a perfect combination of lens and reflectors. This recessed LED downlight is constructed from Aluminium, available in a variety of colour temperatures and CRI>90 provides light quality assurance. Finished in white with optional order only reflectors to suit your aesthetical requirements. Please Note: This product does not support hot plugging. Orlight does not recommend cutting of holes prior to receipt of product in hand.

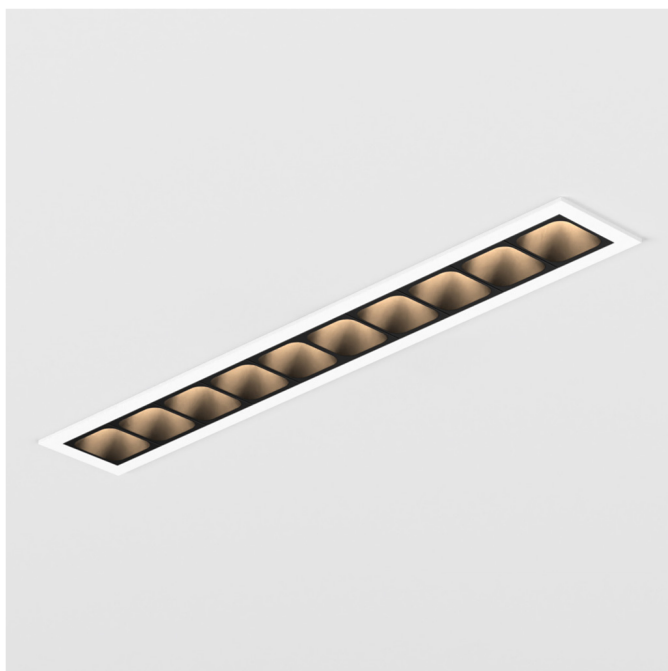

DIMENSIONS

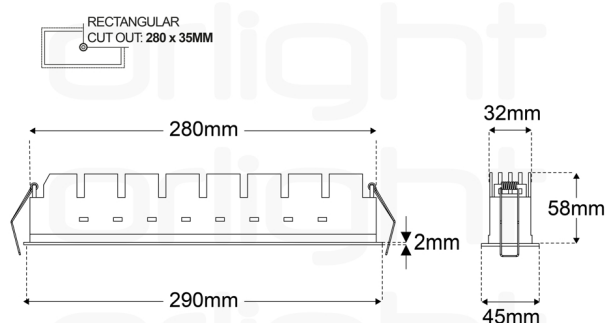

OPTICAL PERFORMANCE

Wattage	23W
Lumen Output	1656LM
Efficacy	72LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	40°
UGR	UGR < 19
Chipset	OSRAM LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	31V
Milliamp / Current	700MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Length	290 MM
Width / Depth	45 MM
Height	58 MM
Cutout	280 MM X 35 MM
Tilt	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
Operating Ambient Temperature	-20°C - +35°C

EMERGENCY


Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	205LM

GRAFIK10-WH-3000K-DALI-B-EM


Item No: GRAFIK – 11236

orlight[®]
FROM SOURCE TO SITE


LIGHT DISTRIBUTION




COMPATIBLE REFLECTORS



GRAFIK10-RF-GL
11221
Grafik Pod Reflector



GRAFIK10-RF-MT
11222
Grafik Pod Reflector



GRAFIK10-RF-WH
11223
Grafik Pod Reflector