

Ref:

ORLWP4-2-23W-LED-DALI-B-EM

Item No: WEATHERPRO – 33303


orlight[®]
FROM SOURCE TO SITE

Orlight IP66 rated LED weather packs are ideal for back of house areas, car parks, storage areas, warehousing, under canopy, walkways and general industrial use. Featuring a high efficacy LED card, body and diffuser constructed from injection moulded Polycarbonate. Supplied with stainless steel clips for added durability. Do not connect the battery supply until the 220/240V A.C. supply is permanently fed. Allow 24 hours of charge before running the lamp in emergency mode.



DIMENSIONS

ORLWP4 4FT SOLID STATE

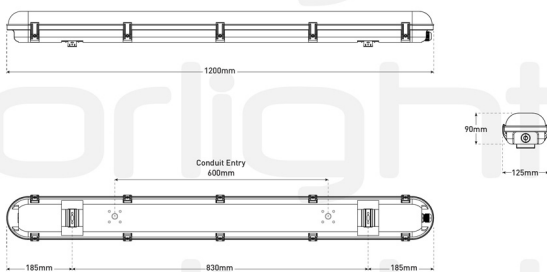

OPTICAL PERFORMANCE

Wattage	23W
Lumen Output	3427LM
Efficacy	149LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	240V
Milliamp / Current	550MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	POLYCARBONATE
Length	1200 MM
Width / Depth	125 MM
Height	90 MM
Weight	2.415KG
Finish	GREY
IP Rating	IP66
IK Rating	IK08
Operating Ambient Temperature	-40°C - +65°C
Lamp Change	SOLID STATE LED

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	500LM

ORLWP4-2-23W-LED-DALI-B-EM

Item No: WEATHERPRO – 33303

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES



SUSPENSION KIT



SUS-KIT-M6-MALE

17044

M6 Angel Hanger