

Ref:

ORL009-TLSV-TR-FG-IP44-WH-9010

Item No: ORL009 – 22446

orlight[®]
FROM SOURCE TO SITE

Trimless adjustable architectural miniature downlight featuring an anti-glare baffle with minimal bezel. 74 mm diameter for discreet installation with 30° tilt capability. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	52
-----	----

CONSTRUCTION

Installation	RECESSED TRIMLESS
Construction	ALUMINIUM
Diameter	74 MM
Height	48 MM
Cutout	64 MM
Weight	0.141KG
Tilt	30°
Rotation	360°
Finish	WHITE
RAL	RAL 9010
IP Rating	IP44
Compatible Light Source	LED ENGINE
Lamp Change	REMOVAL OF FIXTURE


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL009-TLSV-TR-IP44



30° Tilt
ADJUSTABLE

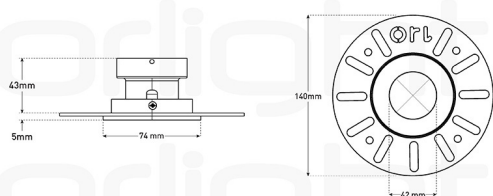

ORL009-TLSV-TR-FG-IP44-WH-9010


Item No: ORL009 – 22446

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

ORL009-TLSV-TR-IP44 with **LED ENGINES** CIRCULAR CUT OUT: 44mm

ADJUSTABLE - 30° Tilt
Allow +5mm for Cable Clearance

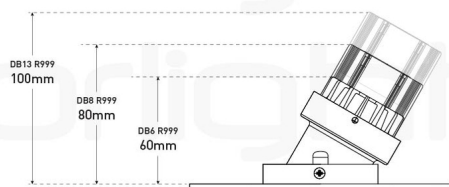

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999




DB13-R999

ORL009-TLSV-TR-FG-IP44-WH-9010

Item No: ORL009 – 22446

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



LOUVRE-HC
11753
Honeycomb Louvre