

Ref:

ORL1019-HS-IP54-AW-9016-NL

Item No: ORL1019 – 13066

orlight[®]
FROM SOURCE TO SITE

Adjustable high specification architectural downlight, with a magnetic lamp change mechanism and spring ceiling retention mechanism (rather than blades). Not suitable for use with conical fire hoods — contact the sales office for fire hood specification. Independently tested and certified for 90-minute fire resistance in solid joist constructions when used with Diablo LED engines. Orlight does not recommend cutting holes before product is received.




DIMENSIONS

ORL1019-HS-IP54



40° Tilt
ADJUSTABLE

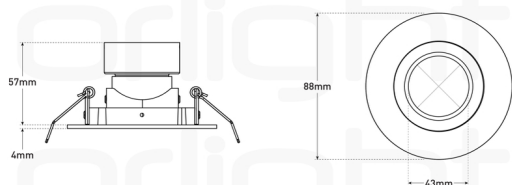

OPTICAL PERFORMANCE

LOR	60
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	88 MM
Height	61 MM
Cutout	78 MM
Weight	0.167KG
Tilt	40°
Rotation	360°
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP54
Fire Rated	YES
Fire Rating	90 MINS - SOLID JOIST
Fire Rated With	DIABLO RETROFIT ENGINE
Fire Test Report	424737
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE


ORL1019-HS-IP54-AW-9016-NL

Item No: ORL1019 – 13066


orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

ORL1019-HS-IP54 with **LED ENGINES**  CIRCULAR CUT OUT: 78mm **ADJUSTABLE - 40° Tilt**
Allow +5mm for Cable Clearance

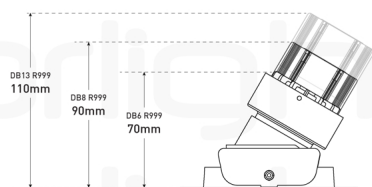

ORL1019-HS-IP54 with **GU10 LAMPS**  CIRCULAR CUT OUT: 78mm **ADJUSTABLE - 40° Tilt**
Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

ORL1019-HS-IP54-AW-9016-NL

Item No: ORL1019 – 13066

orlight[®]
FROM SOURCE TO SITE




DB13-R999

ACCESSORIES




MC2-SL-WL

11912
Slim Spring Mains Converter for Orlight
Magnetic series with flex



LOUVRE-HC

11753
Honeycomb Louvre



ORL1009-1019-SCOVER

12856
Silicone Cover for ORL1009 & ORL1019