


Ref:

# ORLLED600-IP65-20W-4K-9016-EM


Item No: PANEL – 27290

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Solid State IP65 LED panel light 600x600, matt white finished Aluminium surrounded with TPA compliant V0 diffuser. Low energy solution for office and commercial applications. Offering benefits such as instant start, no flickering, silent running and no maintenance. Please Note: This product does not support hot plugging.

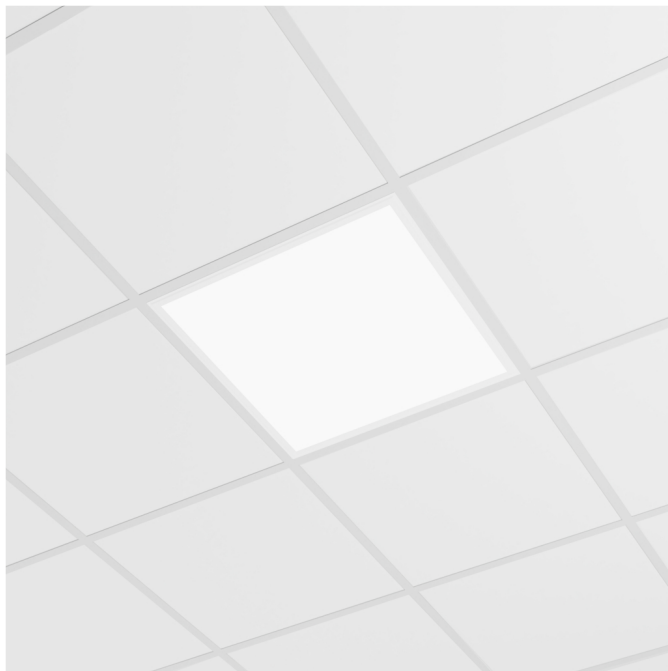

## DIMENSIONS

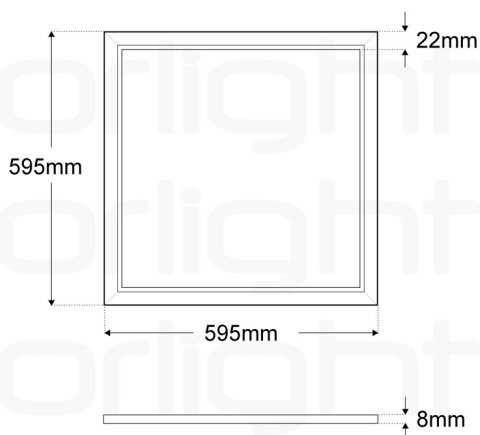

## OPTICAL PERFORMANCE

|                      |                  |
|----------------------|------------------|
| Wattage              | 20W              |
| Lumen Output         | 2780LM           |
| Efficacy             | 139LM/W          |
| CCT                  | 4000K            |
| CRI                  | CRI > 80         |
| Binning              | 2 STEP MACADAMS  |
| Beam Angle           | 120°             |
| Chipset              | ORLIGHT LED      |
| Calculated Chip Life | L70 > 105,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 32-36V           |
| Milliamp / Current          | 500MA            |
| Driver Configuration        | REMOTE           |
| Control                     | SWITCHED         |

## CONSTRUCTION

|               |                  |
|---------------|------------------|
| Installation  | CEILING RECESSED |
| Construction  | ALUMINIUM        |
| Length        | 595 MM           |
| Width / Depth | 595 MM           |
| Height        | 8 MM             |
| Weight        | 3.05KG           |
| Finish        | WHITE            |
| RAL           | RAL 9016         |
| IP Rating     | IP65             |


## EMERGENCY

|                         |                |
|-------------------------|----------------|
| Emergency               | YES            |
| Emergency Configuration | REMOTE         |
| Emergency Duration      | EMERGENCY 3HRS |
| EM Lumen                | 417LM          |


# ORLLED600-IP65-20W-4K-9016-EM

Item No: PANEL – 27290

## LIGHT DISTRIBUTION



## SURFACE MOUNTING KIT



**ORLLED600-SMK-9016**  
14812  
Surface Mounting Kit for Led Panel