

Ref:

# ORLSWDL-5015


Item No: 15373

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

This wonderful indicator light is perfect for accentuating door numbers whilst providing a pleasing marker light effect. An integrated LED light source ensures longevity and efficiency. A direct 240V input negates the need for remote drivers facilitating simple installation.



## DIMENSIONS

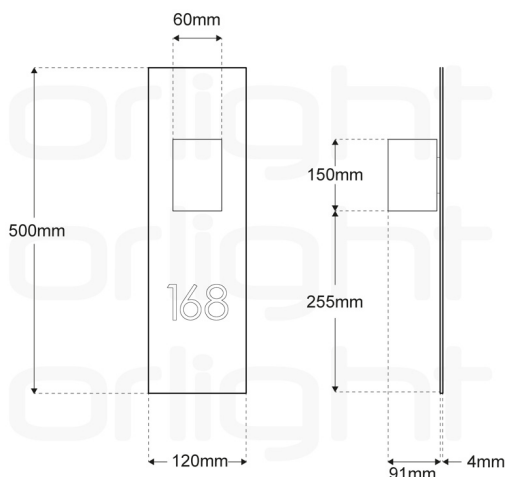

## OPTICAL PERFORMANCE

|              |                 |
|--------------|-----------------|
| Wattage      | 4W              |
| Lumen Output | 320LM           |
| Efficacy     | 80LM/W          |
| CCT          | 3000K           |
| CRI          | CRI > 80        |
| Binning      | 2 STEP MACADAMS |
| Beam Angle   | 180°            |
| Chipset      | CREE 3535 XPE   |
| Chip Life    | L70 > 60,500HRS |

## ELECTRICAL

|                      |          |
|----------------------|----------|
| Voltage              | 240V     |
| Driver Configuration | INTEGRAL |
| Control              | SWITCHED |

## CONSTRUCTION

|              |                   |
|--------------|-------------------|
| Installation | WALL MOUNTED      |
| Construction | ALUMINIUM & GLASS |
| Height       | 150/500 MM        |
| Finish       | BLACK             |
| IP Rating    | IP20              |
| Lamp Change  | SOLID STATE LED   |