

Ref:

LEO455-2-WH-LED-3000K-DALI-B-EM


Item No: LEO – 30859

orlight[®]
FROM SOURCE TO SITE

High output Architectural surface mounted fixture constructed from Aluminium base and Polycarbonate anti-glare diffuser, with CRI>80 to ensure light quality. Microwave detection options available.



DIMENSIONS

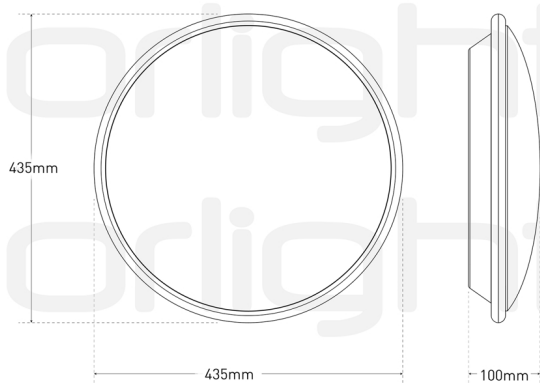

OPTICAL PERFORMANCE

Wattage	28W
Lumen Output	3416LM
Efficacy	122LM/W
CCT	3000K
CRI	CRI > 83
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	240V
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Diameter	435 MM
Width / Depth	100 MM
Weight	2.35KG
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
Operating Ambient Temperature	-40°C - +55°C

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	341LM

LEO455-2-WH-LED-3000K-DALI-B-EM

Item No: LEO – 30859

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

