


Ref:

EZ2-145-18W-BL-4K-DALI-B-EM



Item No: EZENTIAL – 17943

orlight[®]
FROM SOURCE TO SITE

Ezential-2-145 Solid State fixture combines advanced thermal management with a 2835 SMD Samsung chipset for superior performance. Aluminium construction to IP54 with opal diffuser for glare reduction. Single chipset for beam uniformity, CRI>80 light quality. Available with 1-10V and DALI dimmable power supplies. Emergency Battery Pack - Integral. Please Note: This product does not support hot plugging. Orlight does not recommend cutting holes before product is received.

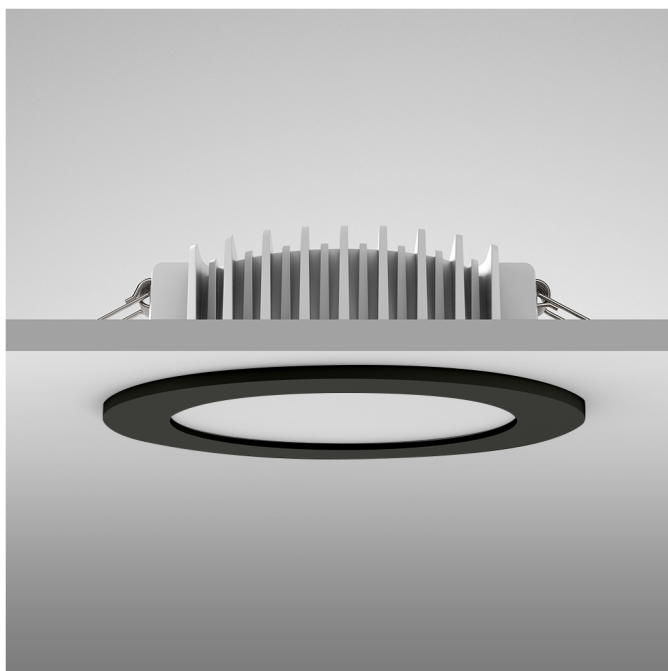

DIMENSIONS



OPTICAL PERFORMANCE

Wattage	18W
Lumen Output	2286LM
Efficacy	127LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	115°
Chipset	SAMSUNG 2835 SMD
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	32-38V
Milliamp / Current	450MA
Driver Configuration	REMOTE
Control	DALI DIMMABLE

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	140 MM
Height	45.5 MM
Cutout	120 MM
Weight	0.4KG
Finish	BLACK
RAL	RAL 9005
IP Rating	IP54

EMERGENCY

Emergency	YES
Emergency Configuration	REMOTE
Emergency Duration	EMERGENCY 3HRS
EM Lumen	343LM

EZ2-145-18W-BL-4K-DALI-B-EM

Item No: EZENTIAL – 17943

orlight®
FROM SOURCE TO SITE

LIGHT DISTRIBUTION

