


Ref:

VECTOR3-INTDALI-3000K-1200MM


Item No: VECTOR-3 – 33061

orlight[®]
FROM SOURCE TO SITE

VECTOR3 is a high-performance solid-state LED linear bar in durable aluminium and frosted tempered glass, for a sleek, robust finish. Surface mounting with an adjustable tilt bracket and removable shield. Integrated driver for easy installation; IP67 and IK07 rated, for protection against water, dust and impact. 30°x60° optic for efficient, controlled light distribution with minimal glare. Please Note: This product does not support hot plugging.

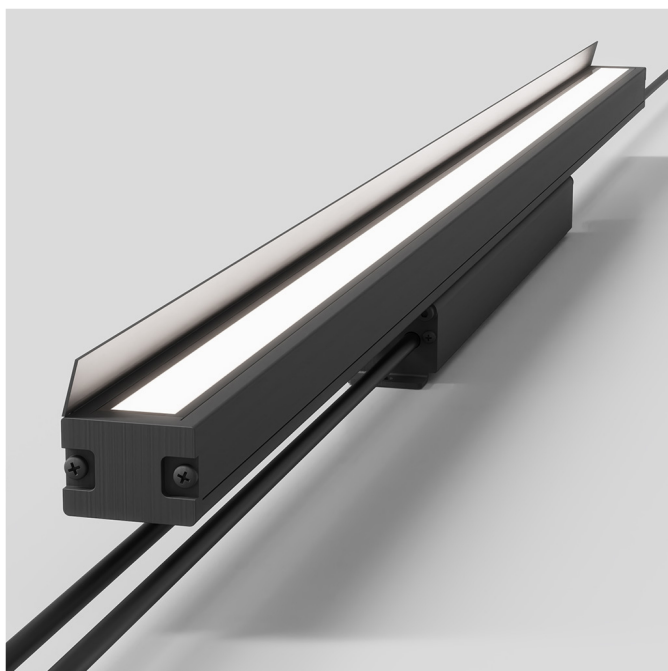

DIMENSIONS

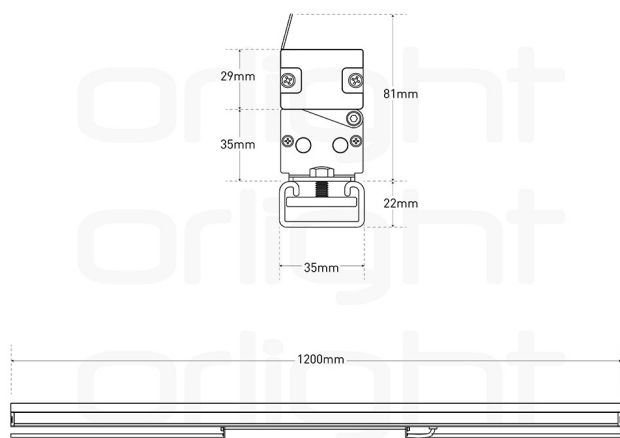

OPTICAL PERFORMANCE

Wattage	48W
Lumen Output	2640LM
Efficacy	55LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	60° X 30°
Chipset	CREE
Chip Life	L70 > 63,500HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	240V
Milliamp / Current	500MA
Driver Configuration	FIXTURE MOUNTED
Control	DALI DIMMABLE
Cable Length	600 MM

CONSTRUCTION


Installation	SURFACE MOUNTED
Construction	ALUMINIUM
Length	1200 MM
Width / Depth	40 MM
Height	82 MM
Weight	3.80KG
Tilt	90°
Finish	BLACK
RAL	RAL 9005
IP Rating	IP67
IK Rating	IK07
Operating Ambient Temperature	-20°C - +45°C

VECTOR3-INTDALI-3000K-1200MM

Item No: VECTOR-3 – 33061

orlight[®]
FROM SOURCE TO SITE


LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES



FIXING DETAILS

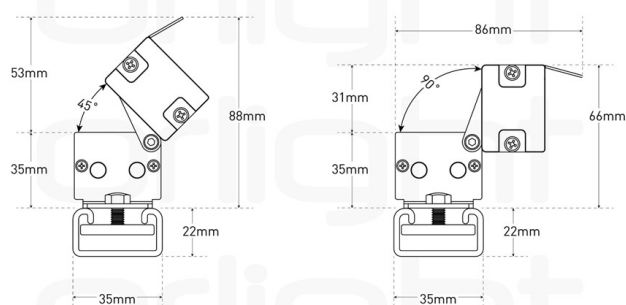

VECTOR3-INTDALI-3000K-1200MM

Item No: VECTOR-3 – 33061

orlight[®]
FROM SOURCE TO SITE

PLEASE NOTE:

This product does not support hot plugging