

Ref:

# LUMINO-DOME-10W-1M-BL-3K-4K

Item No: LUMINO – 33362

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE


Ground-mounted exterior bollard constructed from die-cast aluminium. Rated to IP65 and available in 3000k or 4000k.



SWITCHABLE  
CCT

IP65

## DIMENSIONS

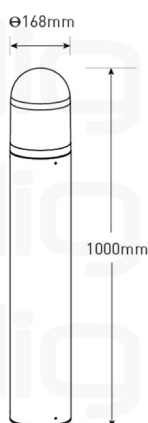

## OPTICAL PERFORMANCE

|              |                   |
|--------------|-------------------|
| Wattage      | 10W               |
| Lumen Output | 1161LM / 1238LM   |
| Efficacy     | 116LM/W / 124LM/W |
| CCT          | 3000K/4000K       |
| CRI          | CRI > 80          |
| Chipset      | 2835 LED          |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 100-240V         |
| Milliamp / Current          | 220MA            |
| Driver Configuration        | INTEGRAL         |
| Control                     | SWITCHED         |


## CONSTRUCTION

|              |                |
|--------------|----------------|
| Installation | SURFACE / ROOT |
| Construction | ALUMINIUM      |
| Diameter     | 168 MM         |
| Height       | 1000 MM        |
| Weight       | 5.75KG         |
| Finish       | BLACK          |
| RAL          | RAL 9005       |
| IP Rating    | IP65           |
| IK Rating    | IK09           |

# LUMINO-DOME-10W-1M-BL-3K-4K

Item No: LUMINO – 33362

## LIGHT DISTRIBUTION



## ROOT MOUNT KIT



**LUMINO-ROOT-MOUNT-KIT**  
28884  
Root Mount Kit