


Ref:

ORLRPVALUHS-SR-AL-2M


Item No: PROTRIM – 15299



Recessed Linear Profile dedicated to the Orlight linear solution. The profile features aluminium construction ideal for dissipation with diffuser to eliminate LED trail. Available with clip mechanism or 3M foam adhesive for ease of installation.

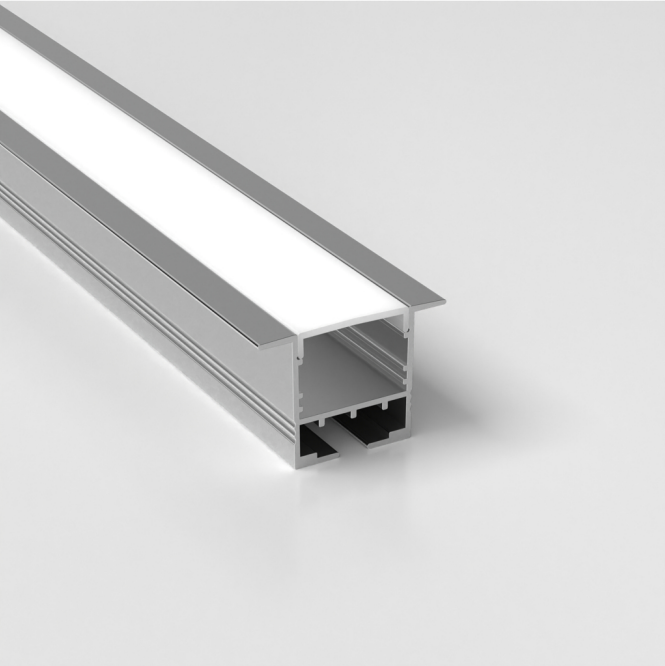

DIMENSIONS

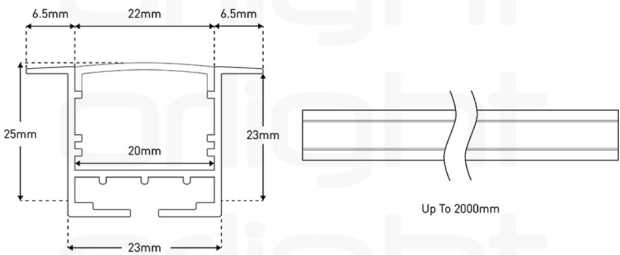

OPTICAL PERFORMANCE

LOR	60
-----	----

CONSTRUCTION

Installation	SEMI RECESSED
Construction	ALUMINIUM & OPAL
Length	2000 MM
Width / Depth	35 MM
Height	25 MM
Cutout	23 MM X 2000 MM
Finish	ALUMINIUM
IP Rating	IP20

ORLRPVALUHS-SR-AL-2M

Item No: PROTRIM – 15299


orlight[®]
FROM SOURCE TO SITE

EVO



24V EVO CRI90

EVO4



IP RATED

ACCESSORIES



ORLRPVALUHS-SR-OPAL-DIFFUSER-2M
42052
Semi Recessed Opal Diffuser



ORLRPVALUHS-SR-OPEN-EC
34434
Open End Cap for ORLRPVALUHS-SR



ORLRPVALUHS-SR-CLOSED-EC
34433
Closed End Cap for ORLRPVALUHS-SR