

Ref:

ORLRPVALUHS-R-2M

Item No: PROTRIM – 15281

orlight[®]
FROM SOURCE TO SITE

Standard round profile for Orlight Linear solutions. The profile features aluminium construction, ideal for heat dissipation. Diffuser designed to eliminate LED trail. Clip mechanism with 3M foam based adhesive for ease of installation.




OPTICAL PERFORMANCE

LOR	70
-----	----

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM & OPAL
Length	2000 MM
Width / Depth	19 MM
Height	15 MM
Finish	ALUMINIUM
IP Rating	IP20

DIMENSIONS

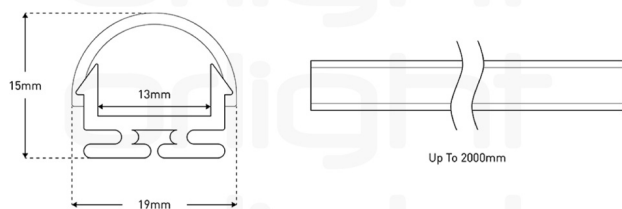

ORLRPVALUHS-R-2M

Item No: PROTRIM – 15281

orlight[®]
FROM SOURCE TO SITE

EVO



24V EVO CRI90

EVO4



IP RATED


ACCESSORIES



ORLRPVALUHS-R-CLOSED-EC

40008

Closed End Cap for ORLRPVALUHS-R



ORLRPVALUHS-R-OPEN-EC

40007

Open End Cap for ORLRPVALUHS-R