


Ref:

ORL1551U-CE-WH-LED-4K-MS-EM


Item No: ORL1551 – 33857

orlight[®]
FROM SOURCE TO SITE

High powered decorative round fixture features Aluminium construction and anti-glare glass diffuser. Integral LED Driver. Designed to be used with Conduits. The fixture is rated to IP65 and is available in a variety of finishes. Mains switched, 3 hour emergency, Occupancy detection, DALI and 1-10V options.

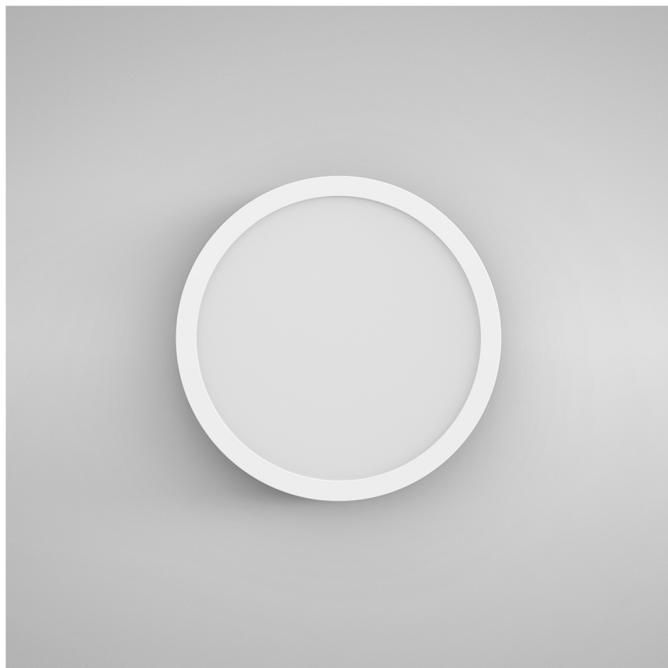

DIMENSIONS

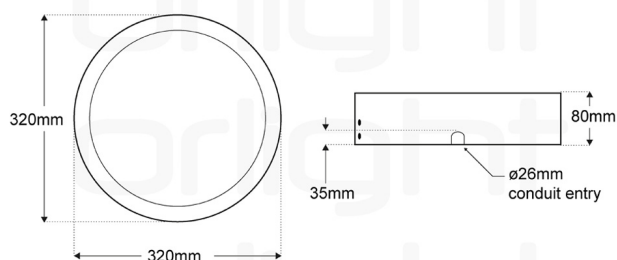

OPTICAL PERFORMANCE

Wattage	20W
Lumen Output	2280LM
Efficacy	114LM/W
CCT	4000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V
Milliamp / Current	550MA
Driver Configuration	INTEGRAL
Control	MICROWAVE SENSOR-EM

CONSTRUCTION

Installation	SURFACE
Construction	ALUMINIUM
Diameter	320 MM
Height	80 MM
Finish	WHITE
RAL	RAL 9016
IP Rating	IP65
IK Rating	IK06
Operating Ambient Temperature	-25°C - +45°C

EMERGENCY


Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	342LM

ORL1551U-CE-WH-LED-4K-MS-EM

Item No: ORL1551 – 33857

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

Gear Tray Fixing Details

