

Ref:

# ORLWP4-2-44W-LED

Item No: WEATHERPRO – 31667


**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Orlight IP66 rated LED weather packs are ideal for back of house areas, car parks, storage areas, warehousing, under canopy, walkways and general industrial use. Featuring a high efficacy LED card, body and diffuser constructed from injection moulded Polycarbonate. Supplied with stainless steel clips for added durability. Emergency option available. Do not connect the battery supply until the 220/240V A.C. supply is permanently fed. Allow 24 hours of charge before running the lamp in emergency mode.



## DIMENSIONS

### ORLWP4 4FT SOLID STATE

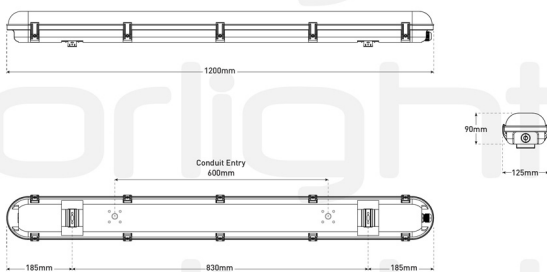

## OPTICAL PERFORMANCE

|                      |                  |
|----------------------|------------------|
| Wattage              | 44W              |
| Lumen Output         | 6336LM           |
| Efficacy             | 144LM/W          |
| CCT                  | 4000K            |
| CRI                  | CRI > 80         |
| Binning              | 2 STEP MACADAMS  |
| Beam Angle           | 120°             |
| Chipset              | ORLIGHT LED      |
| Calculated Chip Life | L70 > 105,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 240V             |
| Milliamp / Current          | 1050MA           |
| Driver Configuration        | INTEGRAL         |
| Control                     | SWITCHED         |

## CONSTRUCTION

|                               |                 |
|-------------------------------|-----------------|
| Installation                  | SURFACE         |
| Construction                  | POLYCARBONATE   |
| Length                        | 1200 MM         |
| Width / Depth                 | 125 MM          |
| Height                        | 90 MM           |
| Weight                        | 2.125KG         |
| Finish                        | GREY            |
| IP Rating                     | IP66            |
| IK Rating                     | IK08            |
| Operating Ambient Temperature | -40°C - +65°C   |
| Lamp Change                   | SOLID STATE LED |

## EMERGENCY


|                         |           |
|-------------------------|-----------|
| Emergency               | AVAILABLE |
| Emergency Configuration | INTEGRAL  |

# ORLWP4-2-44W-LED

Item No: WEATHERPRO – 31667

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION



## ADDITIONAL PRODUCT IMAGES



## SUSPENSION KIT



### SUS-KIT-M6-MALE

17044

M6 Angel Hanger