

Ref:

ASPECT-WW-11W-27K-WH

Item No: ASPECT – 45002


orlight[®]
FROM SOURCE TO SITE

High-performance solid-state wall wash LED downlight with high CRI for smooth, uniform wall illumination. Featuring a compact aluminium body, matte white finish and precision optics for exceptional vertical lighting performance.



NEW!

DIMENSIONS

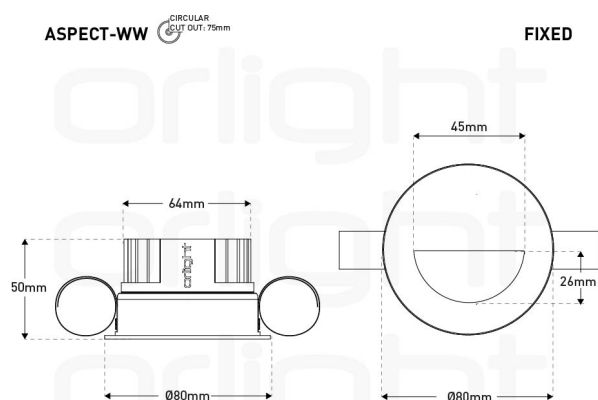

OPTICAL PERFORMANCE

Wattage	11W
Lumen Output	1232LM
Efficacy	112LM/W
CCT	2700K
CRI	CRI > 96
Binning	2 STEP MACADAMS
Beam Angle	ASYMMETRIC°
Chipset	BRIDGELUX

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	36V
Milliamp / Current	250MA
Driver Configuration	REMOTE

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	80 MM
Height	50 MM
Cutout	75 MM
Finish	MATT WHITE
RAL	RAL 9010
IP Rating	IP54

ASPECT-WW-11W-27K-WH

Item No: ASPECT – 45002

orlight[®]
FROM SOURCE TO SITE

DRIVER CONFIGURATION

DIMMING	DRIVER	CODE
Switched	DOMINO-250MA-DR-DIM	21973
Mains Dimmable	DOMINO-250MA-DR-DIM	21973
DALI	ORL-DALI-NFC-15CC-250MA	44657
DALI	MAXDR-MINI-250MA	22249

SWITCHED



DOMINO-250MA-DR-DIM
21973
Switched & Mains Dimmable Driver

MAINS DIMMABLE




DOMINO-250MA-DR-DIM
21973
Switched & Mains Dimmable Driver

DALI



ORL-DALI-NFC-15CC-250MA
44657
NFC Programmable 15W CC 250mA DALI Driver

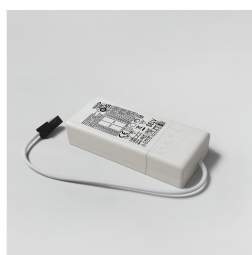

MAXDR-MINI-250MA
22249
Mini 1-10V/DALI & Push Dimming Driver