

Ref:

ORL009-TR-IP44-WH-9016-NL

Item No: ORL009 – 12781

orlight[®]
FROM SOURCE TO SITE

Trimless fixed architectural miniature downlight featuring an anti-glare baffle with minimal bezel. 74 mm diameter for discreet installation. This downlight has been independently tested and certified for 90-minute fire resistance in solid joist constructions when used with our Diablo LED engines. View the full fire test report here. Orlight does not recommend cutting of holes prior to receipt of product in hand.




DIMENSIONS

ORL009-TR-IP44



FIXED

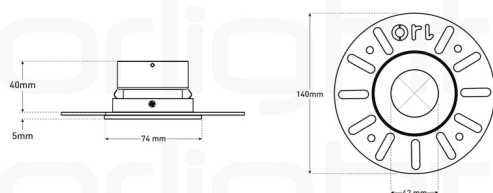

OPTICAL PERFORMANCE

LOR	58
-----	----

CONSTRUCTION

Installation	RECESSED TRIMLESS
Construction	ALUMINIUM
Diameter	74 MM
Height	45 MM
Cutout	64 MM
Tilt	FIXED
Rotation	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP44
Fire Rated	YES
Fire Rating	90 MINS - SOLID JOIST
Fire Rated With	DIABLO RETROFIT ENGINE
Fire Test Report	424737
Compatible Light Source	LED ENGINE
Lamp Change	CLIP MECHANISM

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL009-TR-IP44-WH-9016-NL

Item No: ORL009 – 12781

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

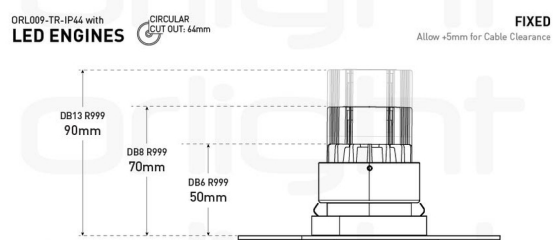

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999




DB13-R999

ORL009-TR-IP44-WH-9016-NL

Item No: ORL009 – 12781

orlight[®]
FROM SOURCE TO SITE

ACCESSORIES



LOUVRE-HC
11753
Honeycomb Louvre