

Ref:

# SUS-100-17W/M-WH-4K-2400-DALI


Item No: ORLINE-100 – 34508

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Online-100 is an advanced suspended fixture for commercial settings, with a streamlined linear design and a width of 100mm. Low UGR of less than 16 for enhanced visual comfort. Choose from various lengths to customise your lighting solution. Supplied with an integral driver for simplified installation.



## DIMENSIONS

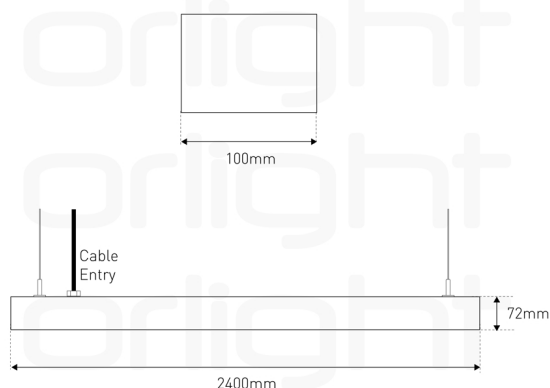

## OPTICAL PERFORMANCE

|                      |                  |
|----------------------|------------------|
| Wattage              | 40W              |
| Lumen Output         | 5480LM           |
| Efficacy             | 137LM/W          |
| CCT                  | 4000K            |
| CRI                  | CRI > 80         |
| Binning              | 2 STEP MACADAMS  |
| Beam Angle           | 90°              |
| UGR                  | <16              |
| Chipset              | ORLIGHT LED      |
| Calculated Chip Life | L70 > 105,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 113V             |
| Milliamp / Current          | 350MA            |
| Driver Configuration        | INTEGRAL         |
| Control                     | DALI DIMMABLE    |

## CONSTRUCTION

|                               |                |
|-------------------------------|----------------|
| Installation                  | SUSPENDED      |
| Construction                  | ALUMINIUM      |
| Length                        | 2400 MM        |
| Width / Depth                 | 100 MM         |
| Height                        | 72 MM          |
| Weight                        | 6.6KG          |
| Diffuser                      | MICROPRISMATIC |
| Finish                        | WHITE          |
| RAL                           | RAL 9016       |
| IP Rating                     | IP20           |
| IK Rating                     | IK06           |
| Operating Ambient Temperature | -20°C - +40°C  |


## EMERGENCY

|                         |           |
|-------------------------|-----------|
| Emergency               | AVAILABLE |
| Emergency Configuration | INTEGRAL  |

# SUS-100-17W/M-WH-4K-2400-DALI

Item No: ORLINE-100 – 34508

## LIGHT DISTRIBUTION



## ADDITIONAL PRODUCT IMAGES



## ADDITIONAL DIMENSIONS

