

Ref:

# GLIDE-MINI-8W-WH-4K

Item No: GLIDE – 45016


**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

High-performance solid-state adjustable LED downlight with high CRI for accurate colour rendering. Featuring a compact aluminium body, matte white finish and low-glare optics for precise directional lighting.



**NEW!**

## DIMENSIONS

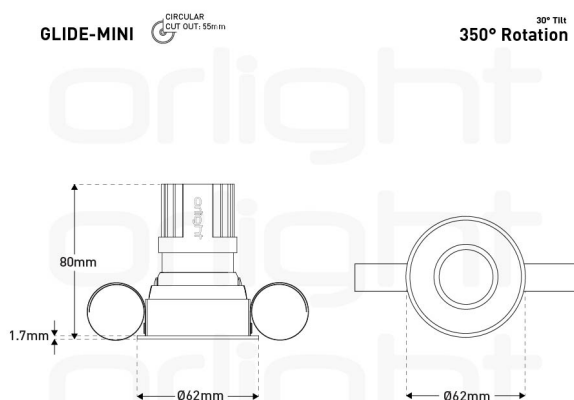

## OPTICAL PERFORMANCE

|              |                       |
|--------------|-----------------------|
| Wattage      | 8W                    |
| Lumen Output | 952LM                 |
| Efficacy     | 119LM/W               |
| CCT          | 4000K                 |
| CRI          | CRI > 96              |
| Binning      | 2 STEP MACADAMS       |
| Beam Angle   | 12° / 24° / 36° / 55° |
| Chipset      | BRIDGELUX             |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 36V              |
| Milliamp / Current          | 180MA            |
| Driver Configuration        | REMOTE           |

## CONSTRUCTION

|              |            |
|--------------|------------|
| Installation | RECESSED   |
| Construction | ALUMINIUM  |
| Diameter     | 62 MM      |
| Height       | 80 MM      |
| Cutout       | 55 MM      |
| Tilt         | 30°        |
| Rotation     | 350°       |
| Finish       | MATT WHITE |
| RAL          | RAL 9010   |
| IP Rating    | IP54       |

## EMERGENCY

|                         |           |
|-------------------------|-----------|
| Emergency               | AVAILABLE |
| Emergency Configuration | REMOTE    |


# GLIDE-MINI-8W-WH-4K

Item No: GLIDE – 45016

## DRIVER CONFIGURATION

| DIMMING        | DRIVER                  | CODE  |
|----------------|-------------------------|-------|
| Switched       | BRSDR-SW-180MA          | 22237 |
| Switched       | DOMINO-180MA-DR-DIM     | 21972 |
| Mains Dimmable | DOMINO-180MA-DR-DIM     | 21972 |
| DALI           | ORL-DALI-NFC-15CC-180MA | 33565 |
| DALI           | MAXDR-MINI-180MA        | 22248 |

## SWITCHED



**BRSDR-SW-180MA**  
22237  
Switched Driver



**DOMINO-180MA-DR-DIM**  
21972  
Switched & Mains Dimmable Driver

## MAINS DIMMABLE




**DOMINO-180MA-DR-DIM**  
21972  
Switched & Mains Dimmable Driver

## DALI



**ORL-DALI-NFC-15CC-180MA**  
33565  
NFC Programmable 15W CC 180mA DALI Driver



**MAXDR-MINI-180MA**  
22248  
Mini 1-10V/DALI & Push Dimming Driver