

Ref:

ORL009-TR-WH-9016-NL

Item No: ORL009 – 12783

orlight[®]
FROM SOURCE TO SITE

Trimless fixed architectural miniature downlight featuring an anti-glare baffle with minimal bezel. 74 mm diameter for discreet installation. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	66
-----	----

CONSTRUCTION

Installation	RECESSED TRIMLESS
Construction	ALUMINIUM
Diameter	74 MM
Height	45 MM
Cutout	64 MM
Weight	0.133KG
Tilt	FIXED
Rotation	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP20
Compatible Light Source	LED ENGINE
Lamp Change	CLIP MECHANISM


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL009-TR-IP20




FIXED

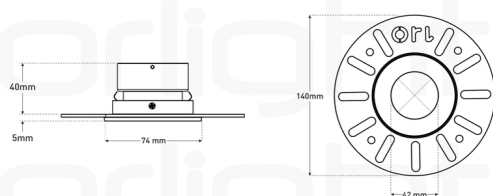

ORL009-TR-WH-9016-NL

Item No: ORL009 – 12783

ADDITIONAL DIMENSIONS

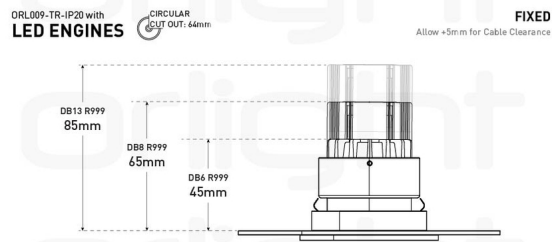

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999




DB11-R999



DB13-R999

ACCESSORIES



LOUVRE-HC
11753
Honeycomb Louvre