


Ref:

ORLIG1M-S-IP54-AW-9016-NL

Item No: ORLIG – 14317

orlight[®]
FROM SOURCE TO SITE

Architectural square downlight featuring an anti-glare baffle and magnetic lamp change mechanism. 360 degree rotation and tilt capability. Slim line construction allowing for applications with restricted recess depth. Discreet application due to minimal trim design to appear almost trimless in-situ. Orlight does not recommend cutting of holes prior to receipt of product in hand.

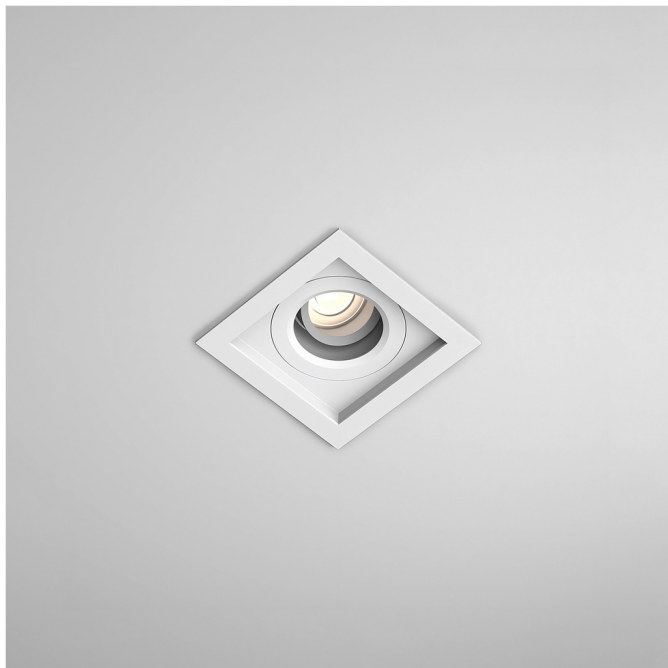

DIMENSIONS

OPTICAL PERFORMANCE

LOR	64
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Length	96 MM
Width / Depth	96 MM
Height	64 MM
Cutout	88 X 88 MM
Weight	0.245KG
Tilt	10°
Rotation	360°
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP54
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM

EMERGENCY


Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORLIG1M-S-IP54



SQUARE
CUT OUT: 88x88mm

10° Tilt
ADJUSTABLE

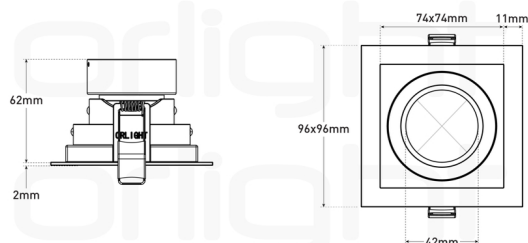


ORLIG1M-S-IP54-AW-9016-NL

Item No: ORLIG – 14317

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

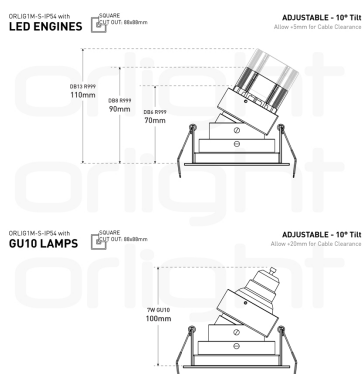

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999

ORLIG1M-S-IP54-AW-9016-NL

Item No: ORLIG – 14317

orlight[®]
FROM SOURCE TO SITE


ACCESSORIES



MC1
11894
Standard Mains Converter



MC1-SL-WL
11901
Slim Spring Mains Converter for Orlight Classic, Twist & Lock & Shower series.



LOUVRE-HC
11753
Honeycomb Louvre