

Ref:

ORLEDBAR-3000K-1000MM


Item No: LEDBAR – 14820

orlight[®]
FROM SOURCE TO SITE

Solid state linear bar with integrated CRI90+ Luxeon chipset. 20 degree optic as standard for light projection. Aluminium construction rated to IP65, suitable for exterior applications. Supplied with optional mounting clips allowing for the fixture to be angled. Please Note: This product does not support hot plugging.



DIMENSIONS

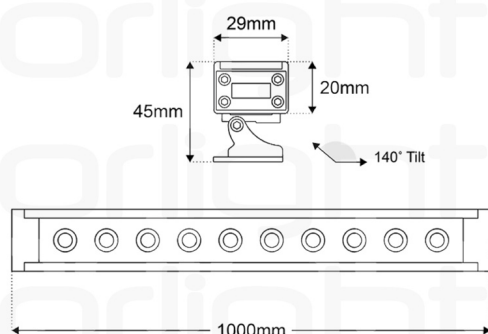

OPTICAL PERFORMANCE

Wattage	20W
Lumen Output	1457LM
Efficacy	73LM/W
CCT	3000K
CRI	CRI > 90
Binning	2 STEP MACADAMS
Beam Angle	20°
Chipset	LUXEON 3030 2D

ELECTRICAL

Voltage	24V
Driver Configuration	REMOTE

CONSTRUCTION


Installation	SURFACE MOUNTED
Construction	ALUMINIUM
Length	1000MM
Width / Depth	29 MM
Height	45 MM
Weight	0.830KG
Tilt	ADJUSTABLE
Finish	ALUMINIUM
IP Rating	IP65

ORLEDBAR-3000K-1000MM


Item No: LEDBAR – 14820

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

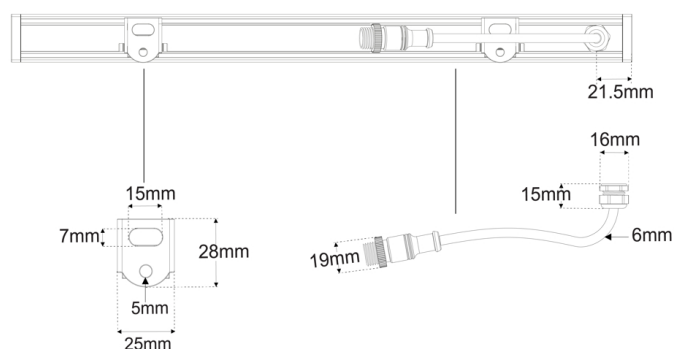

POWER SUPPLY



ORLRPV2460
15214
24V Switched Driver



ORLRPV2435
15210
24V Switched Driver



ORLRPV24150
15203
24V Switched Driver



ORLRPV24100
15199
24V Switched Driver

ORLEDBAR-3000K-1000MM

Item No: LEDBAR – 14820

orlight[®]
FROM SOURCE TO SITE

MAINS DIMMABLE



ORLRPV50-24MD
15250
24V Mains Dimmable Driver



ORLRPV25-24MD
15221
24V Mains Dimmable Driver



ORLRPV100-24MD
15169
24V Mains Dimmable Driver

1-10V/DALI INTERFACE




ORLRPV-INTERFACE-MINI
15357
Constant Voltage Interface for 1-10V dimming



ORLDALIINTERFACE-12-24-36V
14054
DALI/PUSH Dimmable Interface

ACCESSORIES

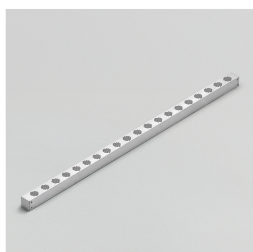

ORLEDBAR-LVR-1000MM
14824
Louvre for LEDBAR Range