

WM-BL-3K-1204-DALI-B-EM

orlight[®]
FROM SOURCE TO SITE




Wattage	31W
Lumen Output	3627LM
Efficacy	117LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	120°
Chipset	ORLIGHT LED
Calculated Chip Life	L70 > 105,000HRS

Constant Current or Voltage	CONSTANT CURRENT
Voltage	110-240V
Milliamp / Current	300MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

Installation	WALL MOUNTED
Construction	ALUMINIUM
Length	1204 MM
Width / Depth	50 MM
Height	90 MM
Finish	BLACK
RAL	RAL 9005
IP Rating	IP20

Emergency	YES
Emergency Configuration	INTEGRAL
Emergency Duration	EMERGENCY 3HRS
EM Lumen	290LM

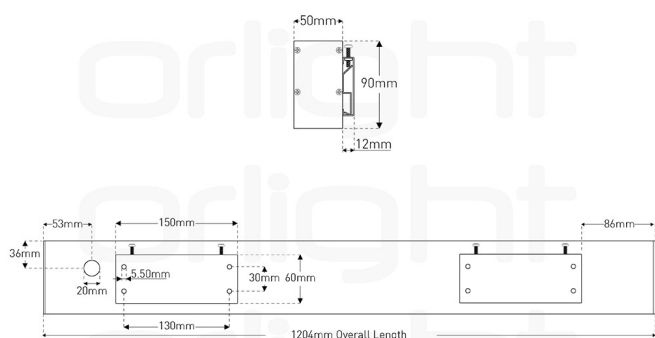


WM-BL-3K-1204-DALI-B-EM

Item No: ORLINE-50 – 26587

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



ADDITIONAL PRODUCT IMAGES

