

Ref:

ORL6019-HS-AW-9016-NL

Item No: ORL6019 – 13673

orlight[®]
FROM SOURCE TO SITE

The lamp is housed in a position flush with the face of the ceiling. An outer retaining collar allows ease of location of the adjustable high specification luminaire. Ongoing lamp maintenance is achieved by removal of the centre body via magnetic lamp retention. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	100
-----	-----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	97 MM
Height	25 MM
Cutout	86 MM
Weight	0.125KG
Tilt	30°
Rotation	360°
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP20
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL6019-IP20



30° Tilt
ADJUSTABLE

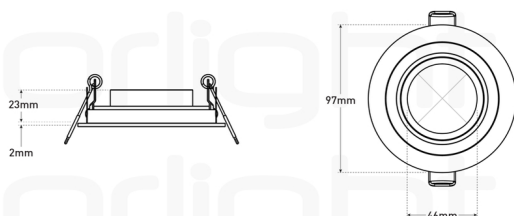


ORL6019-HS-AW-9016-NL

Item No: ORL6019 – 13673


orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

ORL6019-IP20 with **LED ENGINES**  **ADJUSTABLE - 30° Tilt**
Allow +5mm for Cable Clearance

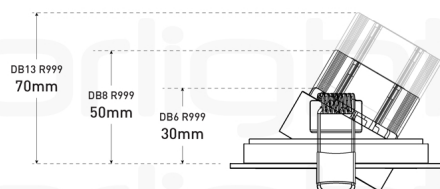

ORL6019-IP20 with **GU10 LAMPS**  **ADJUSTABLE - 30° Tilt**
Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

ORL6019-HS-AW-9016-NL

Item No: ORL6019 – 13673

orlight[®]
FROM SOURCE TO SITE



DB13-R999

ACCESSORIES



MC1-SL-WL

11901

Slim Spring Mains Converter for Orlight Classic, Twist & Lock & Shower series.



ORL6019-COLLAR

13672

Retaining Downlight Collar for ORL6009/6019