

Ref:

# ORLLM736-HS-BR-2700K


Item No: TELESO – 14960

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Miniature recessed fixture complete with integral CREE LED package. Frosted optic serves to minimise glare coupled with a diffuse beam distribution. Marine Grade 316 Stainless Steel, Bronze and Black finishes available with construction rated to IP67. Inline driver options include Mains, 1-10V and DALI dimmable solutions. Additionally, an Inground Tube accessory is included with the product. Please Note: This product does not support hot plugging.



## DIMENSIONS

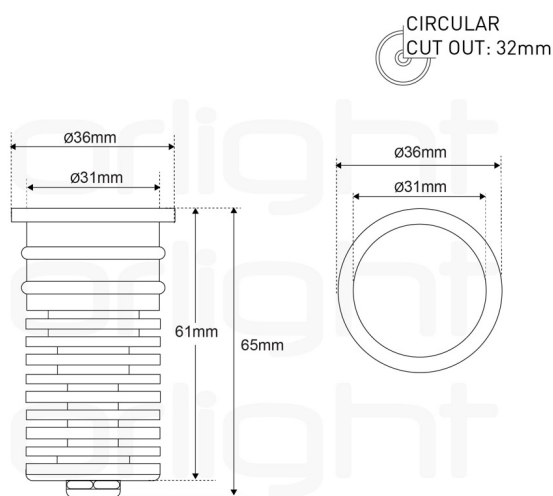

Cable Length: 1100mm

## OPTICAL PERFORMANCE

|              |                 |
|--------------|-----------------|
| Wattage      | 3.8W            |
| Lumen Output | 286LM           |
| Efficacy     | 75LM/W          |
| CCT          | 2700K           |
| CRI          | CRI > 90        |
| Binning      | 2 STEP MACADAMS |
| Beam Angle   | 30°             |
| Chipset      | CREE            |
| Chip Life    | L70 > 50,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 11V              |
| Milliamp / Current          | 350MA            |
| Driver Configuration        | REMOTE           |
| Cable Length                | 1100MM           |

## CONSTRUCTION


|                               |               |
|-------------------------------|---------------|
| Installation                  | RECESSED      |
| Construction                  | ALUMINIUM     |
| Diameter                      | 36 MM         |
| Width / Depth                 | 31 MM         |
| Height                        | 65 MM         |
| Cutout                        | 32 MM         |
| Weight                        | 0.2KG         |
| Tilt                          | FIXED         |
| Finish                        | BRONZE        |
| IP Rating                     | IP67          |
| IK Rating                     | IK07          |
| Operating Ambient Temperature | -20°C - +45°C |

# ORLLM736-HS-BR-2700K

Item No: TELESO – 14960


**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION



## ADDITIONAL DIMENSIONS

TELESO - ORLLM736-HS  
Inground Tube Accessory

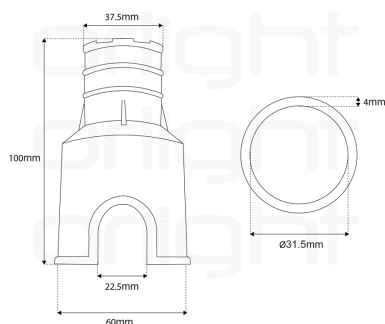

## DRIVER CONFIGURATION

| CONTROL    | IP RATING | DRIVER                  | CODE  | MIN. FITTING | MAX. FITTING |
|------------|-----------|-------------------------|-------|--------------|--------------|
| Switched   | IP68      | ORLRPV350CC             | 15231 | 1            | 2            |
| Switched   | IP42      | ORLRPV350-35-APC        | 15230 | 3            | 8            |
| Switched   | IP66      | ORLRPV350-35-APC-IP66   | 31555 | 3            | 8            |
| Mains      | IP20      | ORLRPV20D-350MA         | 46595 | 1            | 3            |
| 1-10V/Push | IP20      | MAXDR-MINI-350MA        | 22251 | 1            | 4            |
| DALI       | IP20      | ORL-DALI-NFC-15CC-350MA | 34715 | 1            | 4            |

## PLEASE NOTE:

This product does not support hot plugging

# ORLLM736-HS-BR-2700K

Item No: TELESO – 14960

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

---

## SWITCHED (IP42)

---



### ORLRPV350-35-APC

15230

Constant current 350mA Driver

---

## SWITCHED (IP66)

---



### ORLRPV350-35-APC-IP66

31555

Constant current 350mA Driver

---

## SWITCHED (IP68)

---



### ORLRPV350CC

15231

Constant current 350mA Driver

---

## MAINS (IP20)

---



### ORLRPV20D-350MA

46595

Mains Dimmable Driver

# ORLLM736-HS-BR-2700K

Item No: TELESO – 14960

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

---

## 1-10V/PUSH DIM (IP20)

---



### MAXDR-MINI-350MA

22251

Mini 1-10V/DALI & Push Dimming Driver

---

## DALI (IP20)

---



### ORL-DALI-NFC-15CC-350MA

34715

NFC Programmable 15W CC 350mA DALI  
Driver