

Ref:

TATE-1000-4000K-DALI


Item No: TATE – 41200

orlight[®]
FROM SOURCE TO SITE

The TATE-1000 is a modern architectural exterior LED bollard light, designed for sleek, low-profile applications in landscape and pathway lighting. Standing at 1000mm, it delivers downward-only, glare-free illumination ideal for gardens, courtyards, and public walkways. Featuring an integral LED driver, the TATE-1000 offers streamlined installation, reliable performance, and a clean, contemporary finish, making it the ideal solution for high-specification outdoor lighting schemes.



DIMENSIONS

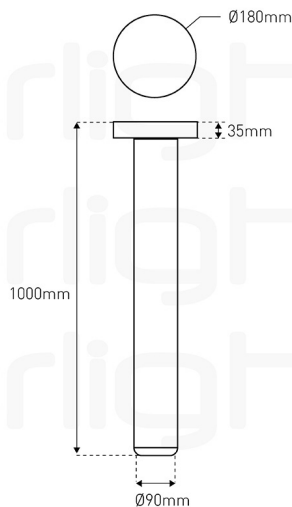

OPTICAL PERFORMANCE

Wattage	12W
Lumen Output	1188LM
Efficacy	99LM/W
CCT	4000K
CRI	CRI > 80
Beam Angle	115°
Chipset	2835 LED
Chip Life	L70 > 50,000HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	220-240V
Milliamp / Current	300MA
Driver Configuration	INTEGRAL
Control	DALI DIMMABLE

CONSTRUCTION

Installation	SURFACE MOUNTED
Construction	ALUMINIUM
Diameter	180 MM
Height	1000 MM
Weight	3.3KG
Finish	BLACK
RAL	RAL 9005
IP Rating	IP65
IK Rating	IK08
Operating Ambient Temperature	-30°C - +45°C

TATE-1000-4000K-DALI

Item No: TATE – 41200

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION

