

Ref:

ORLCL-WH-IP54

Item No: ORLCL – 14045

orlight
FROM SOURCE TO SITE

Fixed architectural downlight with minimal trim to remain discreet in-situ, available in standard or textured with RAL9016 finish. Recessed light source serves to minimise glare. This downlight has been independently tested and certified for 90-minute fire resistance in solid joist constructions when used with our Diablo LED engines. View the full fire test report here. Orlight does not recommend cutting of holes prior to receipt of product in hand.



OPTICAL PERFORMANCE



LOR	84
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	84 MM
Height	53 MM
Cutout	78 MM
Weight	0.095KG
Tilt	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP54
Fire Rated	YES
Fire Rating	90 MINS - SOLID JOIST
Fire Rated With	DIABLO RETROFIT ENGINE
Fire Test Report	424737
Compatible Light Source	GU10 / ENGINE
Lamp Change	REMOVAL OF FIXTURE

DIMENSIONS

ADDITIONAL DIMENSIONS

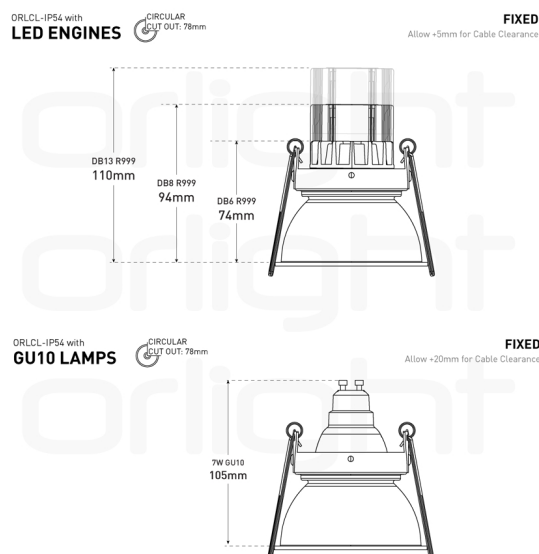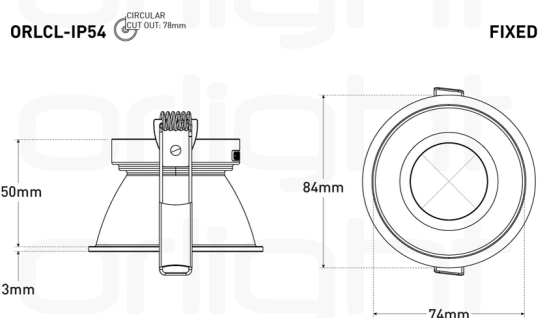

ORLCL-WH-IP54

Item No: ORLCL – 14045

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999


ACCESSORIES



MC1
11894
Standard Mains Converter



MC1-WL
11905
Wired Mains Converter for Orlight Classic, Twist
& Lock & Shower series



LOUVRE-HC
11753
Honeycomb Louvre