


Ref:

LUNGO600-FG-3000K-24V


Item No: LUNGO – 11875

orlight[®]
FROM SOURCE TO SITE

Recessed linear fixture with IP67 Stainless Steel construction. Integrated CREE XPE LED chipset with Anti-Glare recess & 115 degree light distribution. Inline driver options include switched, 1-10V and DALI dimmable solutions. Please Note: This product does not support hot plugging.

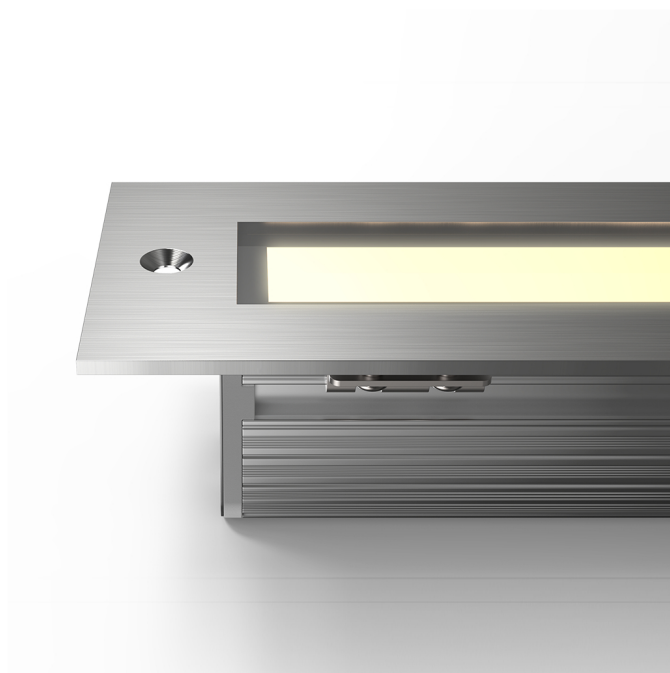

DIMENSIONS

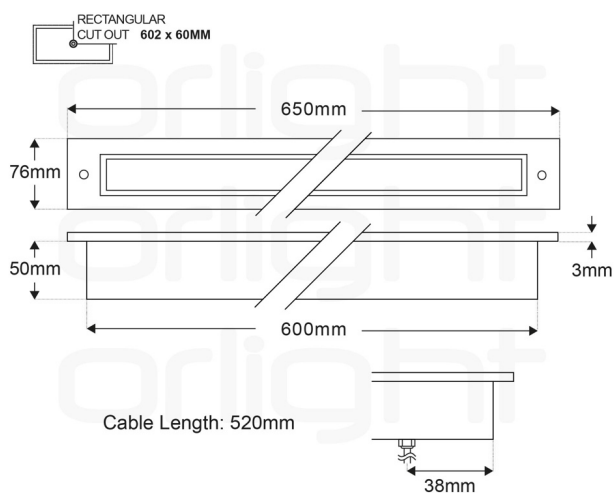

OPTICAL PERFORMANCE

Wattage	12W
Lumen Output	575LM
Efficacy	48LM/W
CCT	3000K
CRI	CRI > 80
Binning	2 STEP MACADAMS
Beam Angle	115°
Chipset	CREE XPE
Chip Life	L70 > 60,500HRS

ELECTRICAL

Constant Current or Voltage	CONSTANT VOLTAGE
Voltage	24V
Driver Configuration	REMOTE
Cable Length	520MM

CONSTRUCTION


Installation	RECESSED
Construction	STAINLESS STEEL
Length	650 MM
Width / Depth	76 MM
Height	50 MM
Cutout	602 X 60 MM
Weight	2.027KG
Tilt	FIXED
Finish	316 MARINE GRADE
IP Rating	IP67

LUNGO600-FG-3000K-24V

Item No: LUNGO – 11875

orlight[®]
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



PLEASE NOTE:

This product does not support hot plugging

POWER SUPPLY



ORLRPV2460
15214
24V Switched Driver



ORLRPV2435
15210
24V Switched Driver



ORLRPV24150
15203
24V Switched Driver



ORLRPV24100
15199
24V Switched Driver

MAINS DIMMABLE



ORLRPV50-24MD
15250
24V Mains Dimmable Driver



ORLRPV25-24MD
15221
24V Mains Dimmable Driver



ORLRPV150-24MD
15193
24V Mains Dimmable Driver



ORLRPV100-24MD
15169
24V Mains Dimmable Driver

LUNGO600-FG-3000K-24V

Item No: LUNGO – 11875

orlight[®]
FROM SOURCE TO SITE

1-10V/DALI INTERFACE



ORLRPV-INTERFACE-MINI

15357

Constant Voltage Interface for 1-10V dimming



ORLDALIINTERFACE-12-24-36V

14054

DALI/PUSH Dimmable Interface

ACCESSORIES



LUNGO600-BACK-BOX

11874

LUNGO-600 - Back Box