

Ref:

ORL1009-SF-IP44-120-WH-9016

Item No: ORL1009 – 12931

orlight[®]
FROM SOURCE TO SITE

Surface mounted downlight featuring an anti-glare baffle and magnetic lamp change mechanism. Integrated GU10 lamp holder for direct 240V input. The fixture is available as IP20 & IP44. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	58
-----	----

ELECTRICAL

Driver Configuration	REMOTE (LED ENGINE)
----------------------	---------------------

CONSTRUCTION


Installation	SURFACE
Construction	ALUMINIUM
Diameter	88 MM
Height	120 MM
Weight	0.607KG
Tilt	FIXED
Finish	WHITE
RAL	RAL 9016
IP Rating	IP44
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL1009-SF-120-IP44

FIXED

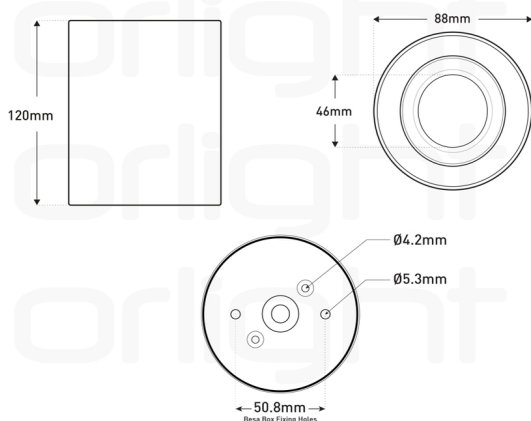

ORL1009-SF-IP44-120-WH-9016

Item No: ORL1009 – 12931

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999