

Ref:

ORL1836-SS-3000K


Item No: 13422

orlight[®]
FROM SOURCE TO SITE

Adjustable recessed wall light with a 2W LED chip and integrated contact sensor. 90° tilt and 330° rotation allows for easy direction of light. Magnetic faceplate allows for access to fixing details. Available in Polished Stainless Steel and Brushed Bronze.



DIMENSIONS

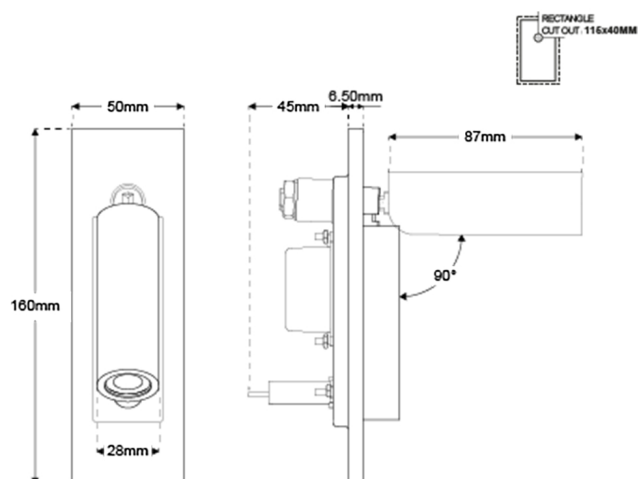

OPTICAL PERFORMANCE

Wattage	2W
Lumen Output	145LM
Efficacy	73LM/W
CCT	3000K
CRI	CRI > 80

ELECTRICAL

Constant Current or Voltage	CONSTANT CURRENT
Voltage	200-240V
Milliamp / Current	550MA
Driver Configuration	INTEGRAL
Control	SWITCHED

CONSTRUCTION


Installation	WALL RECESSED
Construction	STAINLESS STEEL
Height	160 MM
Cutout	115 X 40 MM
Tilt	90°
Rotation	330°
Finish	STAINLESS STEEL
IP Rating	IP20
Lamp Change	SOLID STATE LED

ORL1836-SS-3000K

Item No: 13422

orlight®
FROM SOURCE TO SITE

LIGHT DISTRIBUTION



FIXING DETAILS

