

Ref:

ORL3018-2-IP44-AW-9016


Item No: ORL3018 – 13587

orlight[®]
FROM SOURCE TO SITE

Twin Square Trimless Magnetic Downlight featuring anti-glare baffle, 360 rotation and tilt facility. A magnetic lamp change ensures ease of maintenance without damage to delicate ceilings. Suitable for 50mm diameter retrofit light sources and LED modules. The fixture is available as IP20 & IP44. Please note this product is not suitable for use with conical fire hoods. Please contact the sales office for fire hood specification. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

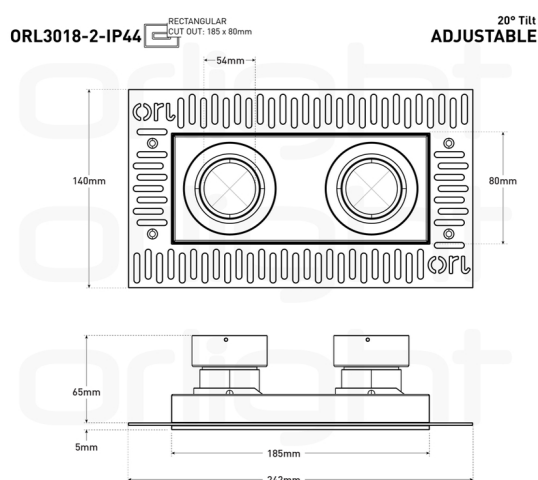


OPTICAL PERFORMANCE

LOR	60
-----	----

CONSTRUCTION

Installation	RECESSED TRIMLESS
Construction	ALUMINIUM
Length	185 MM
Width / Depth	80 MM
Height	70 MM
Cutout	185 X 80 MM
Weight	0.68KG
Tilt	20°
Rotation	360°
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP44
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM

ADDITIONAL DIMENSIONS

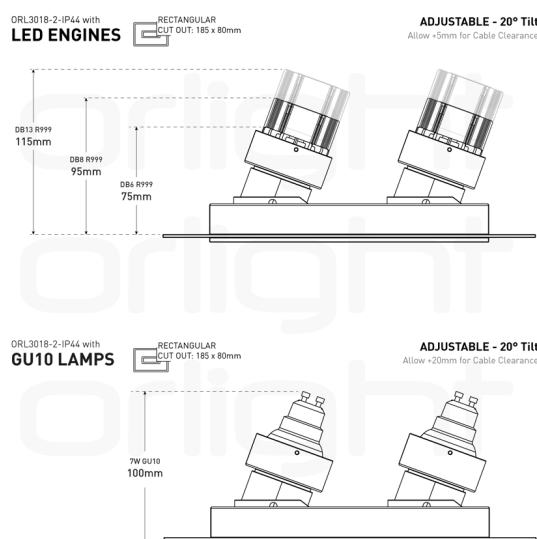

ORL3018-2-IP44-AW-9016

Item No: ORL3018 – 13587

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999

ACCESSORIES




MC2-TR

11915
Long Spring Mains Converter for Orlight
Trimless series



MC2-TR-WL

11918
Long Spring Mains Converter for Orlight
Trimless series with flex



LOUVRE-HC

11753
Honeycomb Louvre