

Ref:

ORLIR1MFX-IP44-AW-9016-NL

Item No: ORLIR – 14679

orlight[®]
FROM SOURCE TO SITE

Architectural downlight featuring an anti-glare baffle and magnetic lamp change mechanism. Discreet application due to minimal trim bezel designed to appear trimless in-situ. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	66
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	85 MM
Height	67 MM
Cutout	81 MM
Weight	0.154KG
Tilt	FIXED
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP44
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORLIR1MFX-IP44



FIXED

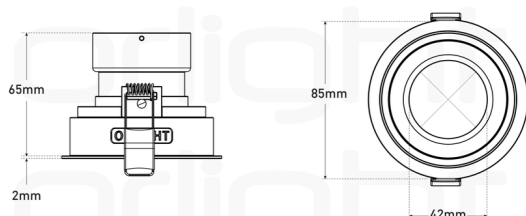


ORLIR1MFX-IP44-AW-9016-NL

Item No: ORLIR – 14679

orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

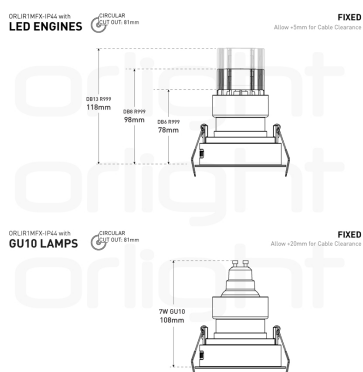

COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999



DB13-R999

ORLIR1MFX-IP44-AW-9016-NL

Item No: ORLIR – 14679


ACCESSORIES



MC1
11894
Standard Mains Converter



MC1-SL-WL
11901
Slim Spring Mains Converter for Orlight Classic, Twist & Lock & Shower series.



LOUVRE-HC
11753
Honeycomb Louvre