

Ref:

# TEMPUS-2-WH-4000K


Item No: TEMPUS – 17187

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

Aluminium 7W LED miniature fixture featuring recessed COB Citizen CLU0B0 LED light source. Construction rated to IP54 allowing versatile application. A 2 Step MacAdams binning strategy ensures colour consistency with single chip technology providing a consistent beam. Light quality assurance with CRI>Ra 80. Fire Rated to 90 minutes. Driver not included. Orlight does not recommend cutting of holes prior to receipt of product in hand.



## DIMENSIONS

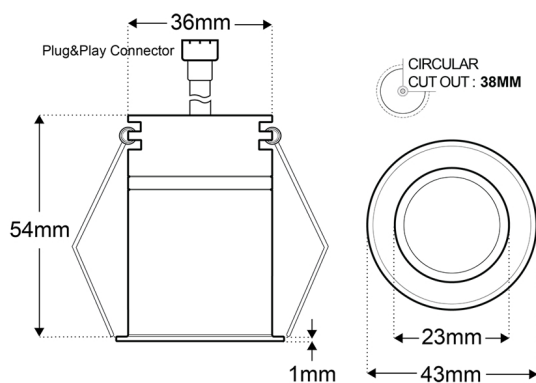

## OPTICAL PERFORMANCE

|                      |                  |
|----------------------|------------------|
| Wattage              | 7W               |
| Lumen Output         | 602LM            |
| Efficacy             | 86LM/W           |
| CCT                  | 4000K            |
| CRI                  | CRI > 80         |
| Binning              | 2 STEP MACADAMS  |
| Beam Angle           | 30°              |
| Chipset              | ORLIGHT LED      |
| Calculated Chip Life | L70 > 100,000HRS |

## ELECTRICAL

|                             |                  |
|-----------------------------|------------------|
| Constant Current or Voltage | CONSTANT CURRENT |
| Voltage                     | 36V              |
| Milliamp / Current          | 145MA            |
| Driver Configuration        | REMOTE           |

## CONSTRUCTION

|                               |                        |
|-------------------------------|------------------------|
| Installation                  | RECESSED               |
| Construction                  | ALUMINIUM              |
| Diameter                      | 43 MM                  |
| Height                        | 54 MM                  |
| Cutout                        | 38 MM                  |
| Weight                        | 0.34KG                 |
| Tilt                          | FIXED                  |
| Finish                        | WHITE                  |
| RAL                           | RAL 9016               |
| IP Rating                     | IP54                   |
| Fire Rated                    | YES                    |
| Fire Rating                   | 90 MINS - SOLID JOIST  |
| Fire Test Report              | <a href="#">400398</a> |
| Operating Ambient Temperature | -20°C - +45°C          |

## EMERGENCY


|                         |           |
|-------------------------|-----------|
| Emergency               | AVAILABLE |
| Emergency Configuration | REMOTE    |

# TEMPUS-2-WH-4000K

Item No: TEMPUS – 17187

**orlight**<sup>®</sup>  
FROM SOURCE TO SITE

## LIGHT DISTRIBUTION



## SWITCHED/MAINS DRIVER




### TEMPUS-2-DR-DIM-2IC

17167

Driver for Tempus Range

## 1-10V/DALI DRIVER



### MAXDR-MINI-140MA

22247

Mini 1-10V/DALI & Push Dimming Driver