

Ref:

ORL1009-S-IP44-AW-9010-NL

Item No: ORL1009 – 12940

orlight[®]
FROM SOURCE TO SITE

Architectural downlight featuring an anti-glare baffle and magnetic lamp change mechanism. The recessed light source serves to minimise glare whilst slim line construction allows for applications with restricted recess depth. Please note this product is not suitable for use with conical fire hoods. Please contact the sales office for fire hood specification. Orlight does not recommend cutting of holes prior to receipt of product in hand.



DIMENSIONS

OPTICAL PERFORMANCE

LOR	78
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	88 MM
Height	38 MM
Cutout	78 MM
Weight	0.138KG
Tilt	FIXED
Finish	ALL WHITE
RAL	RAL 9010
IP Rating	IP44
Compatible Light Source	GU10 / ENGINE
Lamp Change	MAGNETIC MECHANISM


EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE

ORL1009-S-IP44



FIXED

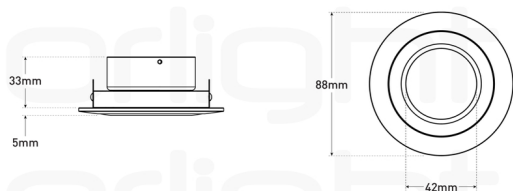


ORL1009-S-IP44-AW-9010-NL

Item No: ORL1009 – 12940


orlight[®]
FROM SOURCE TO SITE

ADDITIONAL DIMENSIONS

ORL1009-S-IP44 with **LED ENGINES**  **FIXED**
CIRCULAR CUT OUT: 78mm Allow +5mm for Cable Clearance

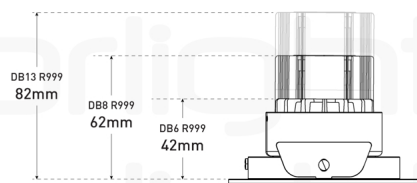

ORL1009-S-IP44 with **GU10 LAMPS**  **FIXED**
CIRCULAR CUT OUT: 78mm Allow +20mm for Cable Clearance



COMPATIBLE GU10 LAMP



LX4 - SWITCHED



LX5 - MAINS DIMMABLE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999



DB11-R999

ORL1009-S-IP44-AW-9010-NL

Item No: ORL1009 – 12940

orlight[®]
FROM SOURCE TO SITE




DB13-R999

ACCESSORIES




MC2-SL-WL

11912
Slim Spring Mains Converter for Orlight
Magnetic series with flex



LOUVRE-HC

11753
Honeycomb Louvre



ORL1009-1019-SCOVER

12856
Silicone Cover for ORL1009 & ORL1019