

Ref:

ORL009-AW-9016-NL

Item No: ORL009 – 12743

orlight
FROM SOURCE TO SITE

Fixed architectural miniature downlight featuring an anti-glare baffle with minimal bezel. 72mm diameter for discreet installation. Please note this product is not suitable for use with conical fire hoods. Please contact the sales office for fire hood specification. Orlight does not recommend cutting of holes prior to receipt of product in hand.




DIMENSIONS

ORL009-IP20



FIXED

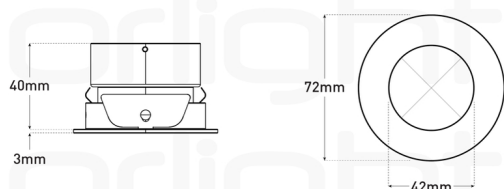

OPTICAL PERFORMANCE

LOR	82
-----	----

CONSTRUCTION

Installation	RECESSED
Construction	ALUMINIUM
Diameter	72 MM
Height	43 MM
Cutout	64 MM
Weight	0.057KG
Tilt	FIXED
Rotation	FIXED
Finish	ALL WHITE
RAL	RAL 9016
IP Rating	IP20
Compatible Light Source	LED ENGINE
Lamp Change	CLIP MECHANISM

EMERGENCY

Emergency	AVAILABLE
Emergency Configuration	REMOTE


ADDITIONAL DIMENSIONS

ORL009-IP20 with
LED ENGINES



FIXED

Allow +5mm for Cable Clearance



ORL009-AW-9016-NL

Item No: ORL009 – 12743

orlight[®]
FROM SOURCE TO SITE

COMPATIBLE LED ENGINE



DB6-R999



DB8-R999



DB8-F-R999




DB11-R999



DB13-R999

ACCESSORIES



LOUVRE-HC
11753
Honeycomb Louvre